

Application Note AN0037

Binary Messages

Of

SkyTraq Phoenix GNSS Receiver

Ver 1.4.49

Dec. 30, 2020

## Binary Message Protocol


The SkyTraq binary message protocol manual provides the detailed descriptions on the SkyTraq binary protocol serving as a communicating interface between SkyTraq GNSS receivers and an external host such as PC, Notebook and mobile personal device. It is a standard protocol used by all SkyTraq devices and provides users a satisfactory control over the GNSS receivers.

The SkyTraq GNSS receiver outputs standard NMEA messages during normal operation. This NMEA messages may be a scheduled output at a specified rate subject to user's requests. The SkyTraq binary message protocol is designed with cares on reliable transmissions of data, ease & efficiency of implement, and payload independence mechanism which ensure users to retrieve data in a most effective & flexible way. The overall binary protocol messages can be categorized as input and output messages. Input messages provide the functionality to users to control the behavior of the GNSS receiver and to retrieve the detailed information of the GNSS status in real-time. Output messages, on the other hand, are information strings that GNSS receiver responses to requests from hosts and can optionally periodically reports the Position, Velocity and Time (PVT) via NMEA or binary messages.

# BINARY MESSAGE STRUCTURE

## Message Format

The following picture shows the structure of a binary message.

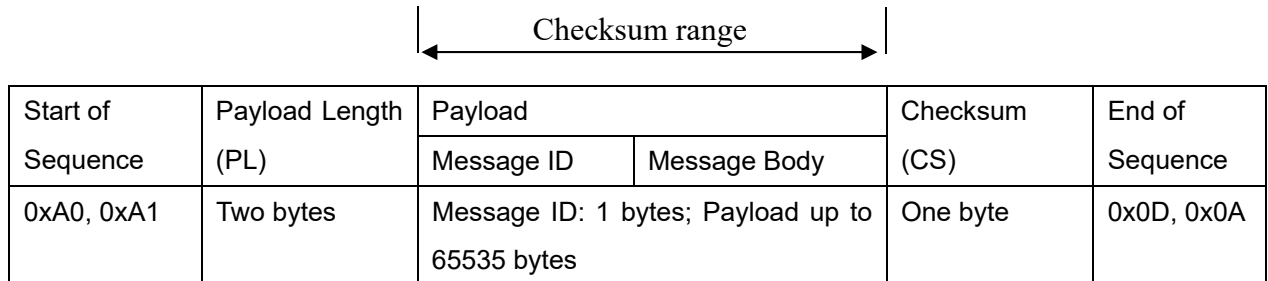

The syntax of the message is shown below.

<0xA0,0xA1><PL><Message ID><Message Body><CS><0x0D,0x0A>

## Start of Sequence

This field contains two bytes of values 0xA0, 0xA1 which indicate start of Messages.

## Payload Length

The payload length (PL) field contains 16 bits of value which indicates the length of payload.

## Payload

The payload field consists of 2 sub-fields, Message ID and Message Body. Message ID field defines the message ID.

Sub-Field	Values
Message ID (ID)	0x01~0xFF
Message Body	Data Bytes

## Message Body

The Message Body may further consist of 2 sub-fields, Sub-Message ID (Sub-ID) and Sub-Message Body.

Sub-Field	Values
-----------	--------

Sub-Message ID(SID)	0x01~0xFF
Sub-Message Body	Data Bytes

## Checksum

Checksum (CS) field is transmitted in all messages. The checksum field is the last field in a message before the end of sequence field. The checksum is the 8-bit exclusive OR of only the payload bytes which start from Message ID until the last byte prior to the checksum byte. A reference to the calculation of CS is provided below,

$$\begin{aligned}
 &CS = 0, N=PL; \\
 &\text{For } n = 0 \text{ to } N \\
 &CS = CS \oplus \langle \text{Payload Byte } \# n \rangle
 \end{aligned}$$

## End of Sequence

This field contains two bytes of values 0x0D, 0x0A which indicate end of Messages.

## Data Byte Ordering

All payloads in binary protocol are transferred in big-endian format. The high order byte is transmitted first followed by the low order byte for data size larger than a byte (e.g. UINT32, DPFP).

## Data Type Definition

UINT8	8 bit unsigned integer
UINT16	16 bit unsigned integer
UINT32	32 bit unsigned integer
SINT8	8 bit signed integer
SINT16	16 bit signed integer
SINT32	32 bit signed integer
SPFP	32 bit single precision floating point number
DPFP	64 bit double precision floating point number

## MESSAGE FLOW

Host can perform actions to GNSS receiver by issuing a request or a set message. The message flow between Host and GNSS receiver is designed under the considerations of certain reliable transmission. SkyTraq binary message protocol requires an ACK response from the GNSS receiver upon receiving a successful input message and on the other hand, requires a NACK response from the receiver to a failed input message. Figure 1 shows a message flow that a host requests information from GNSS receiver and the GNSS receiver responds with an ACK and information respectively. Figure 2 shows a message flow with un-successful input message. Therefore, all requests (input messages) will have a corresponding ACK or NACK to be related with. However, output messages will not require the host to confirm by an ACK or NACK back in current design.

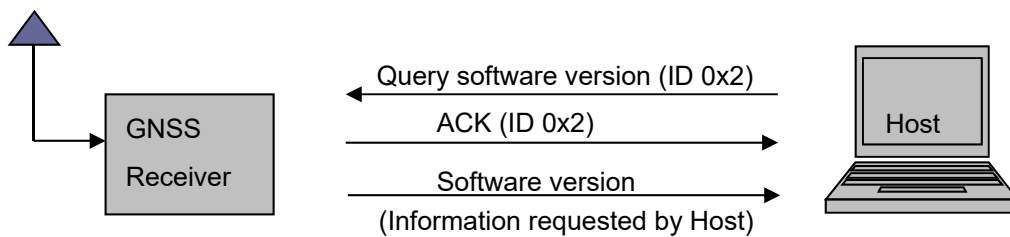


Figure 1

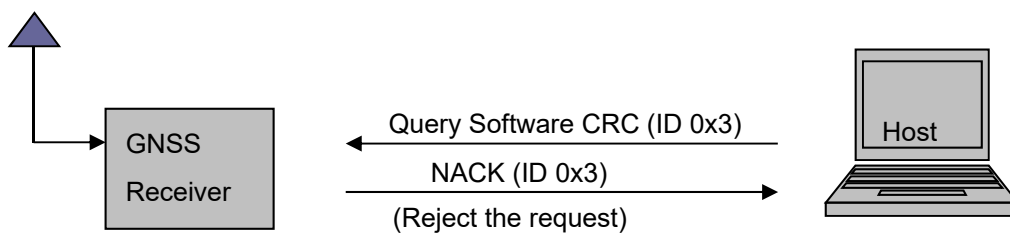


Figure 2

## MESSAGE LIST

This section provides brief information about available SkyTraq binary input, output and sub-id messages shown in a tabular list. All the messages are listed by Message ID. Full descriptions of input and output messages will be described in later Sections.

Input Messages				
ID (Hex)	ID (Decimal)	Attribute	Name	Descriptions
0x1	1	Input	System Restart	Force system to restart
0x2	2	Input	Query Software version	Query revision information of software
0x3	3	Input	Query Software CRC	Query the CRC of the software
0x4	4	Input	Set Factory Defaults	Set system to factory default values
0x5	5	Input	Configure Serial Port	Set up serial port COM, baud rate, data bits, stop bits and parity
0x9	9	Input	Configure Message Type	Configure and select the output message type
0xC	12	Input	Configure Power Mode	Set system power mode
0xE	14	Input	Configure Position Update Rate	Configure the position update rate of GNSS system
0x10	16	Input	Query Position Update Rate	Query the position update rate of GNSS system
0x15	21	Input	Query Power Mode	Query the power mode status of GNSS receiver
0x2A	42	Input	Configure DOP Mask	Configure values of DOP mask
0x2B	43	Input	Configure Elevation and CNR Mask	Configure values of Elevation and CNR Mask
0x2E	46	Input	Query DOP Mask	Query the information of DOP mask used by GNSS receiver
0x2F	47	Input	Query Elevation and CNR Mask	Query the values of elevation mask and CNR mask used by GNSS receiver
0x30	48	Input	Get GPS Ephemeris	Retrieve GPS ephemeris data of the GNSS receiver
0x39	57	Input	Configure Position Pinning	Enable or disable position pinning of GNSS receiver
0x3A <sup>*1</sup>	58	Input	Query Position Pinning	Query position pinning status of the GNSS receiver
0x3B <sup>*1</sup>	59	Input	Configure Position Pinning Parameters	Set position pinning parameters of GNSS receiver

0x41	65	Input	Set GPS Ephemeris	Set GPS ephemeris data to the GNSS receiver
0x44 <sup>*1</sup>	68	Input	Query 1PPS Timing	Query 1PPS timing of the GNSS receiver
0x45	69	Input	Configure 1PPS Cable Delay	Configure cable delay of 1PPS timing
0x46	70	Input	Query 1PPS Cable Delay	Query 1PPS cable delay of GNSS receiver
0x4B	75	Input	Configure NMEA talker ID	Configure NMEA talker ID of GNSS receiver
0x4F	79	Input	Query NMEA talk ID	Query NMEA talker ID of GNSS receiver
0x54 <sup>*1</sup>	84	Input	Configure 1PPS Timing	Configure 1PPS timing of GNSS receiver
0x55 <sup>*1</sup>	85	Input	Configure 1PPS Output Mode	Configure 1PPS Output Mode of GNSS receiver
0x56 <sup>*1</sup>	86	Input	Query 1PPS Output Mode	Query 1PPS Output Mode of GNSS receiver
0x5B	91	Input	Get GLONASS Ephemeris	Retrieve GLONASS ephemeris data of the GNSS receiver
0x5C	92	Input	Set GLONASS Ephemeris	Set GLONASS ephemeris data to the GNSS receiver
0x5F	95	Input	Get GLONASS Time Correction Parameters	Retrieve GLONASS time correction parameters $\tau_C$ and $\tau_{GPS}$ of the GNSS receiver
0x60	96	Input	Set GLONASS Time Correction Parameters	Set GLONASS time correction parameters $\tau_C$ and $\tau_{GPS}$ to the GNSS receiver
<b>Messages with Sub-ID</b>				
ID/SubID (Hex)	ID/Sub-ID (Decimal)	Attribute	Name	Descriptions
0x62/0x1	98/1	Input	Configure SBAS	Configure SBAS parameters of GNSS receiver
0x62/0x2	98/2	Input	Query SBAS Status	Query SBAS status of GNSS receiver
0x62/0x3	98/3	Input	Configure QZSS	Configure QZSS parameters of GNSS receiver
0x62/0x4	98/4	Input	Query QZSS Status	Query QZSS status of GNSS receiver
062/0x80	98/128	Output	SBAS Status	SBAS status of GNSS receiver
062/0x81	98/129	Output	QZSS Status	QZSS status of GNSS receiver
0x63/0x1	99/1	Input	Configure SAEE	Configure SAEE of GNSS receiver
0x63/0x2	99/2	Input	Query SAEE	Query SAEE of GNSS receiver

0x63/0x80	99/128	Output	SAEE status	SAEE status of GNSS receiver
0x64/0x1	100/1	Input	Query Boot Status	Query boot status of GNSS receiver
0x64/0x2	100/2	Input	Configure Extended NMEA Message Interval	Configure extended NMEA message interval of GNSS Receiver
0x64/0x3	100/3	Input	Query Extended NMEA Message Interval	Query extended NMEA message interval of GNSS receiver
0x64/0x6	100/6	Input	Configure Interference Detection	Configure interference detection of GNSS receiver
0x64/0x7	100/7	Input	Query Interference Detection Status	Query interference detection status of GNSS receiver
0x64/0xA	100/10	Input	Configure GPS parameter search engine number	Configure parameter search engine number of GPS receiver
0x64/0xB	100/11	Input	Query GPS Parameter Search Engine Number	Query parameter search engine number of GPS receiver
0x64/0x11	100/17	Input	Configure Position Fix Navigation Mask	Configure the position fix mask of GNSS receiver
0x64/0x12	100/18	Input	Query Position Fix Navigation Mask	Query the position fix of GNSS receiver
0x64/0x15	100/21	Input	Configure UTC Reference Time Sync to GPS Time	Configure UTC reference time to GPS receiver to synchronize to GPS time
0x64/0x16	100/22	Input	Query UTC Reference Time Sync to GPS Time	Query the UTC reference time of GPS receiver set to synchronize to GPS time
0x64/0x17	100/23	Input	Configure GNSS Navigation Mode	Configure the navigation mode of GNSS receiver
0x64/0x18	100/24	Input	Query GNSS Navigation Mode	Query the navigation mode of GNSS receiver
0x64/0x19	100/25	Input	Configure GNSS constellation type for navigation solution	Configure the GNSS constellation type used for navigation solution
0x64/0x1A	100/26	Input	Query GNSS constellation type for navigation solution	Query the GNSS constellation type used for navigation solution
0x64/0x1B	100/27	Input	Software Image Download Using ROM External Loader	Software image download using ROM external loader to system flash
0x64/0x1F	100/31	Input	Configure GPS/UTC	Configure GPS/UTC leap seconds of



			leap seconds	GNSS receiver
0x64/0x20	100/32	Input	Query GPS Time	Query GPS time of GNSS receiver
0x64/0x21	100/33	Input	Configure PSTI Message Interval	Configure the PSTI message interval of GNSS receiver
0x64/0x22	100/34	Input	Query PSTI Message Interval	Query the PSTI message interval of GNSS receiver
0x64/0x27	100/39	Input	Configure GNSS Datum Index	Configure GNSS datum index of GNSS receiver
0x64/0x28	100/40	Input	Query GNSS Datum Index	Query GNSS datum index of GNSS receiver
0x64/0x34	100/52	Input	Configure GNSS Geo-Fencing Data by Polygon	Configure geo-fencing data by polygon to GNSS receiver
0x64/0x35	100/53	Input	Query GNSS Geo-Fencing Data by Polygon	Query geo-fencing data by polygon of GNSS receiver
0x64/0x36	100/54	Input	Query GNSS Multi-Polygon Geo-Fencing Result	Query multi-polygon geo-fencing result of GNSS receiver
0x64/0x3B	100/59	Input	Configure NMEA String Interval	Configure the NMEA String interval of GNSS receiver
0x64/0x3C	100/60	Input	Query NMEA String Interval	Query the NMEA String interval of GNSS receiver
0x64/0x4E	100/78	Input	Software Image Download Using Internal Loader	Software image download using internal loader to system flash
0x64/0x4F	100/79	Input	Software Image Download Using External Loader	Software image download using external loader to system flash
0x64/0x7D	100/125	Input	Query Version Extension String	Query version extension string of GNSS receiver
0x64/0x80	100/128	Output	GNSS Boot Status	Boot status of the GNSS receiver
0x64/0x81	100/129	Output	Extended NMEA Message Interval	Extended NMEA message interval of GNSS receiver
0x64/0x83	100/131	Output	Interference Detection Status	Interference detection status of GNSS receiver
0x64/0x85	100/133	Output	GPS Parameter search engine number	Parameter search engine number of GPS receiver
0x64/0x88	100/136	Output	Position Fix Navigation	Position fix navigation mask of GNSS

			Mask	receiver
0x64/0x8A	100/138	Output	GPS UTC Reference Time	UTC reference time of GPS receiver that synchronizes to GPS time
0x64/0x8B	100/139	Output	GNSS Navigation Mode	Navigation mode of GNSS receiver
0x64/0x8C	100/140	Output	GNSS Constellation Type for Navigation Solution	Replying the GNSS constellation type used for navigation solution
0x64/0x8E	100/142	Output	GPS Time	GPS time of GNSS receiver
0x64/0x8F	100/143	Output	PSTI Message Interval	PSTI message interval of GNSS receiver
0x64/0x92	100/146	Output	GNSS Datum Index	Datum Index of GNSS receiver
0x64/0x99	100/153	Output	GNSS Geo-Fencing Data by Polygon	Geo-Fencing Data by Polygon of GNSS receiver
0x64/0x9A	100/154	Output	GNSS Multi-Polygon Geo-Fencing Result	Multi-Polygon Geo-Fencing Result of GNSS receiver
0x64/0x9D	100/157	Output	NMEA String Interval	NMEA String Interval of GNSS receiver
0x64/0xFE	100/254	Output	Version Extension String	Version extension string of GNSS receiver
0x65/0x1	101/1	Input	Configure 1PPS Pulse Width	Configure 1PPS pulse width of GNSS receiver
0x65/0x2	101/2	Input	Query 1PPS Pulse Width	Query 1PPS pulse width of GNSS receiver
0x65/0x3	101/3	Input	Configure 1PPS Frequency Output	Configure 1PPS frequency output of GNSS receiver
0x65/0x4	101/4	Input	Query 1PPS Frequency Output	Query 1PPS frequency output of GNSS receiver
0x65/0x80	101/128	Output	1PPS Pulse Width	1PPS pulse width of GNSS receiver
0x65/0x81	101/129	Output	GNSS 1PPS Frequency Output	1PPS frequency output of GNSS receiver
0x67/0x1	103/1	Input	Set Beidou Ephemeris Data	Set BEIDOU ephemeris data to the GNSS receiver
0x67/0x2	103/2	Input	Get Beidou Ephemeris Data	Retrieve BEIDOU ephemeris data of the GNSS receiver
0x67/0x80	103/128	Output	Beidou Ephemeris Data	Beidou ephemeris data of the GNSS receiver
0x6A/0x6 <sup>+2</sup>	106/6	Input	Configure RTK Mode and Operational Function	Configure Real Time Kinematic mode and operational function of GNSS receiver
0x6A/0x7 <sup>+2</sup>	106/7	Input	Query RTK Mode and Operational Function	Query Real Time Kinematic mode and operational function of GNSS receiver

0x6A/0xC <sup>*2</sup>	106/12	Input	Configure RTK slave base serial port baud rate	Configure RTK slave base serial port baud rate
0x6A/0xD <sup>*2</sup>	106/13	Input	Query RTK slave base serial port baud rate	Query RTK slave base serial port baud rate
0x6A/0x13 <sup>*2</sup>	106/19	Input	Configure RTK Precisely Kinematic Base serial port baud rate	Configure RTK precisely kinematic base serial port baud rate
0x6A/0x14 <sup>*2</sup>	106/20	Input	Query RTK Precisely Kinematic Base serial port baud rate	Query RTK precisely kinematic base serial port baud rate
0x6A/0x83 <sup>*2</sup>	106/131	Output	RTK Mode and Operational Function	Real Time Kinematic mode and operational function of GNSS receiver
0x6A/0x85 <sup>*2</sup>	106/133	Output	RTK Slave Base serial port baud rate	RTK Slave Base Serial port baud rate
0x6A/0x88 <sup>*2</sup>	106/136	Output	RTK Precisely Kinematic Base serial port baud rate	RTK precisely kinematic Base Serial port baud rate
0x6F/0x3	106/3	Input	Set IRNSS ephemeris	Set IRNSS ephemeris data to the GNSS receiver
0x6F/0x4	106/4	Input	Get IRNSS ephemeris	Retrieve IRNSS ephemeris data of the GNSS receiver
0x6F/0x81	106/129	Output	IRNSS ephemeris data	IRNSS ephemeris data of the GNSS receiver
<b>Output Messages</b>				
<b>ID (Hex)</b>	<b>ID (Decimal)</b>	<b>Attribute</b>	<b>Name</b>	<b>Descriptions</b>
0x80	128	Output	Software Version	Software revision of the receiver
0x81	129	Output	Software CRC	Software CRC of the receiver
0x82	130	Output	Reserved	Reserved
0x83	131	Output	ACK	ACK to a successful input message
0x84	132	Output	NACK	Response to an unsuccessful input message
0x86	134	Output	Position Update Rate	Position update rate of GNSS system
0x90	144	Output	GLONASS Ephemeris Data	GLONASS ephemeris data of the GNSS receiver
0x92	146	Output	GLONASS Time Correction Parameters	GLONASS time correction parameters $\tau_C$ and $\tau_{GPS}$

0x93	147	Output	GNSS NMEA Talker ID	NMEA Talker ID of GNSS receiver
0xAF	175	Output	GNSS DOP Mask	DOP Mask used by the GNSS receiver
0xB0	176	Output	Elevation and CNR Mask	Elevation and CNR Mask used by the GNSS receiver
0xB1	177	Output	GPS Ephemeris Data	GPS ephemeris data of the GNSS receiver
0xB4	180	Output	GNSS Position Pinning Status	Position pinning status of the GNSS receiver
0xB9	185	Output	GNSS Power Mode Status	Power mode status of GNSS receiver
0xBB	187	Output	GNSS 1PPS Cable Delay	1PPS cable delay of the GNSS receiver
0xC2 <sup>*1</sup>	194	Output	GNSS 1PPS Timing	1PPS timing information of the GNSS receiver
0xC3 <sup>*1</sup>	195	Output	GNSS 1PPS Output Mode	1PPS output mode of the GNSS receiver

\*1 supported only in timing mode receivers.

\*2 supported only in RTK mode receivers

## INPUT MESSAGES

### SYSTEM RESTART – Force System to restart (0x1)

This is a request message which will reset and restart the GNSS receiver. This command is issued from the host to GNSS receiver and GNSS receiver should respond with an ACK or NACK. The payload length is 15 bytes.

Structure:

<0xA0,0xA1>< PL><01>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 0F 01 01 07 D8 0B 0E 08 2E 03 09 C4 30 70 00 64 16 0D 0A  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	01		UINT8	-
2	Start Mode	01	00 = Reserved 01 = System Reset, Hot start 02 = System Reset, Warm start 03 = System Reset, Cold start 04 = Reserved	UINT8	
3-4	UTC Year	07D8	>= 1980	UINT16	
5	UTC Month	0B	1 ~ 12	UINT8	
6	UTC Day	0E	1 ~ 31	UINT8	
7	UTC Hour	08	0 ~ 23	UINT8	
8	UTC Minute	2E	0 ~ 59	UINT8	
9	UTC Second	03	0 ~ 59	UINT8	
10-11	Latitude	09C4	Between – 9000 and 9000 > 0: North Hemisphere < 0: South Hemisphere	SINT16	1/100 degree
12-13	Longitude	3070	Between – 18000 and 18000 > 0: East Hemisphere < 0: West Hemisphere	SINT16	1/100 degree
14-15	Altitude	0064	Between –1000 and 18300	SINT16	meter
Payload Length : 15 bytes					

**QUERY SOFTWARE VERSION – Query revision information of loaded software (0x2)**

This is a request message which is issued from the host to GNSS receiver to retrieve loaded software version. The GNSS receiver should respond with an ACK along with information of software version, “**SOFTWARE VERSION, ID: 0x80**”, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><02>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 02 00 02 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	02		UINT8	
2	Software Type	00	00 = Reserved 01 = System code	UINT8	
Payload Length : 2 bytes					

**QUERY SOFTWARE CRC – Query CRC information of loaded software (0x3)**

This is a request message which is issued from the host to GNSS receiver to retrieve loaded software CRC. The GNSS receiver should respond with an ACK along with information of software CRC, **“SOFTWARE CRC, ID: 0x81”**, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><03>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 03 00 03 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	03		UINT8	
2	Software Type	00	00 = Reserved 01 = System code	UINT8	
Payload Length : 2 bytes					

**SET FACTORY DEFAULTS – Set the system to factory default values (0x4)**

This is a request message which is issued from the host to GNSS receiver. It will reset the GNSS receiver’s internal parameters to factory default values. The GNSS receiver should respond with an ACK when succeeded and should respond with an NACK when failed. The user data will be erased and filled with factory default values. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><04>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 04 00 04 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	04		UINT8	
2	Type	00	00 = Reserved 01 = reboot after setting to factory defaults	UINT8	
Payload Length : 2 bytes					



**CONFIGURE SERIAL PORT – Set up serial port property (0x5)**

This is a request message which will configure the serial COM port, baud rate. This command is issued from the host to GNSS receiver and GNSS receiver should respond with an ACK or NACK. The payload length is 4 bytes.

Structure:

<0xA0,0xA1>< PL><05>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 04 05 00 00 00 05 0D 0A  
           1 2 3 4

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	05		UINT8	
2	COM port	00	00 = COM 1	UINT8	
3	Baud Rate	00	0: 4800 1: 9600 2: 19200 3: 38400 4: 57600 5: 115200 6: 230400 7: 460800 8: 921600	UINT8	
4	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH 2. temporarily	UINT8	
Payload Length : 4 bytes					

**CONFIGURE MESSAGE TYPE – Configure and select output message type (0x9)**

This is a request message which will change the GNSS receiver output message type. This command is issued from the host to GNSS receiver and GNSS receiver should respond with an ACK or NACK. The payload length is 3 bytes.

Structure:

<0xA0,0xA1>< PL><09>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 09 00 00 09 0D 0A

1 2 3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	09		UINT8	
2	Type	00	00 : No output 01 : NMEA message 02 : Binary Message	UINT8	
3	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 3 bytes					

**CONFIGURE SYSTEM POWER MODE –Set the power mode of GNSS system (0xC)**

This is a request message which is issued from the host to GNSS receiver to configure the system power mode. By default power save mode is enabled, to reduce current consumption by the search engine. The GNSS receiver should respond with an ACK when succeeded and should respond with a NACK when failed. The payload length is 3 bytes.

Structure:

<0xA0,0xA1>< PL><0C>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 0C 00 00 0C 0D 0A

1 2 3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	0C		UINT8	
2	Mode	00	00 = Normal (disable) 01 = Power Save (enable)	UINT8	
3	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH 2: temporarily enabled	UINT8	
Payload Length : 3 bytes					

**CONFIGURE SYSTEM POSITION RATE – Configure the position update rate of GNSS system (0xE)**

This is a request message which is issued from the host to GNSS receiver to configure the system position update rate. Receivers with position rate 4 or higher needs to configure baud rate to 38400 or higher value. The GNSS receiver should respond with an ACK when succeeded and should respond with an NACK when failed. The payload length is 3 bytes.

Structure:

<0xA0,0xA1>< PL><0E>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 0E 01 00 0F 0D 0A  
                   1 2 3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	0E		UINT8	
2	Rate	01	Value with 1, 2, 4, 5, 8, 10, 20, 25, 40, 50 01: 1Hz update rate Note: value with 4 ~10 should work with baud rate 38400 or higher, value with 20 should work with baud rate 115200 or higher, value with 40, 50 should work with 230400	UINT8	
3	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 3 bytes					

**QUERY POSITION UPDATE RATE – Query the position update rate of GNSS system (0x10)**

This is a request message which is issued from the host to GNSS receiver to query position update rate. The GNSS receiver should respond with an ACK along with information of position update rate, “**POSITION UPDATE RATE, ID: 0x86**”, when succeeded and should respond with an NACK when failed. The payload length is 1 byte.

Structure:

<0xA0,0xA1>< PL><10>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 01 10 10 0D 0A

1

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	10		UINT8	
Payload Length : 1 byte					

**QUERY POWER MODE – Query status of power mode of GNSS receiver (0x15)**

This is a request message which is issued from the host to GNSS receiver to query power mode status. The GNSS receiver should respond with an ACK along with power mode status, “**GNSS POWER MODE STATUS, ID: 0xB9**”, when succeeded and should respond with an NACK when failed. The payload length is 1 byte.

Structure:

<0xA0,0xA1>< PL><15>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 01 15 15 0D 0A

1

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	15		UINT8	
Payload Length : 1 byte					

**CONFIGURE DOP MASK – Configure values of DOP mask (0x2A)**

This is a request message which will set the GNSS receiver DOP mode and its corresponding mask. This command is issued from the host to GNSS receiver and GNSS receiver should respond with an ACK or NACK. If either value of PDOP, HDOP or GDOP is not valid, the GNSS receiver will respond with an NACK. The payload length is 9 bytes.

Structure:

<0xA0,0xA1>< PL><2A>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 09 2A 01 00 32 00 32 00 32 00 19 0D 0A  
           1  2  3  4  5  6  7  8  9

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	2A		UINT8	
2	DOP Mode Select	01	00 : Disable 01 : Auto mode, PDOP when 3-D fix and HDOP when 2-D fix 02 : PDOP only 03 : HDOP only 04 : GDOP only	UINT8	
3-4	PDOP Value	0032	Valid values between 0.5~30 Valid input value 5 ~ 300	UINT16	0.1
5-6	HDOP Value	0032	Valid values between 0.5~30 Valid input value 5 ~ 300	UINT16	0.1
7-8	GDOP Value	0032	Valid values between 0.5~30 Valid input value 5 ~ 300	UINT16	0.1
9	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 9 bytes					

**CONFIGURE ELEVATION AND CNR MASK – Configure values of elevation and CNR mask (0x2B)**

This is a request message which will configure the satellite elevation and CNR mask of GNSS receiver. This command is issued from the host to GNSS receiver and GNSS receiver should respond with an ACK or NACK. If either value of elevation or CNR mask is not valid, the GNSS receiver will respond with an NACK. The payload length is 5 bytes.

Structure:

<0xA0,0xA1>< PL><2B>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 05 2B 01 05 0A 00 25 0D 0A  
                   1 2 3 4 5

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	2B		UINT8	
2	Elevation and CNR Mode Select	01	00 : Disable 01 : Elevation and CNR both 02 : Elevation only 03 : CNR only	UINT8	
3	Elevation Mask	05	Valid values between 3~85	UINT8	degree
4	CNR Mask	0A	Valid values between 0~40	UINT8	dB
5	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 5 bytes					



**QUERY DOP MASK – Query information of DOP mask used by the GNSS receiver (0x2E)**

This is a request message which is issued from the host to GNSS receiver to retrieve information of DOP mask. The GNSS receiver should respond with an ACK along with DOP mask information, “**GNSS DOP MASK, ID: 0xAF**”, when succeeded and should respond with an NACK when failed. The payload length is 1 byte.

Structure:

<0xA0,0xA1>< PL><2E>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 01 2E 2E 0D 0A

1

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	2E		UINT8	
Payload Length : 1 byte					

**QUERY ELEVATION AND CNR MASK – Query elevation and CNR mask used by the GNSS receiver (0x2F)**

This is a request message which is issued from the host to GNSS receiver to retrieve information of elevation and CNR mask. The GNSS receiver should respond with an ACK along with elevation and CNR mask information, **“GNSS ELEVATION AND CNR MASK, ID: 0xB0”**, when succeeded and should respond with an NACK when failed. The payload length is 1 byte.

Structure:

<0xA0,0xA1>< PL><2F>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 01 2F 2F 0D 0A

1

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	2F		UINT8	
Payload Length : 1 byte					

**GET GPS EPHEMERIS – Get GPS ephemeris used of GNSS receiver (0x30)**

This is a request message which is issued from the host to GNSS receiver to retrieve GPS ephemeris data. The GNSS receiver should respond with an ACK along with information of ephemeris, **“GPS EPHEMERIS DATA, ID: 0xB1”**, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><30>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 30 00 30 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	30		UINT8	
2	SV #	00	0: means all SVs 1~32 : mean for the particular SV	UINT8	
Payload Length : 2 bytes					

**CONFIGURE POSITION PINNING – Enable or disable position pinning of GNSS receiver (0x39)**

This is a request message which is issued from the host to GNSS receiver to configure the system position pinning. The GNSS receiver should respond with an ACK when succeeded and should respond with an NACK when failed. The payload length is 3 bytes.

Structure:

<0xA0,0xA1>< PL><39>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 39 01 01 39 0D 0A  
1 2 3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	39		UINT8	
2	Position pinning	01	0: default 1: enable 2: disable	UINT8	
3	Attributes	01	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 3 bytes					

**QUERY POSITION PINNING – Query position pinning status of GNSS receiver (0x3A)**

This is a request message which is issued from the host to GNSS receiver to query position pinning status. The GNSS receiver should respond with an ACK along with position pinning status, “**GNSS POSITION PINNING STATUS, ID: 0xB4**”, when succeeded and should respond with an NACK when failed. The payload length is 1 byte.

Structure:

<0xA0,0xA1>< PL><3A>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 01 3A 3A 0D 0A

1

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	3A		UINT8	
Payload Length : 1 byte					

**CONFIGURE POSITION PINNING PARAMETERS – Set position pinning parameters of GNSS receiver (0x3B)**

This is a request message which is issued from the host to GNSS receiver to configure the system position pinning parameters. The GNSS receiver should respond with an ACK when succeeded and should respond with a NACK when failed. The payload length is 12 bytes.

Structure:

<0xA0,0xA1>< PL><3B>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 0C 3B 00 02 00 0A 00 08 00 2D 01 F4 01 E2 0D 0A  
 1 2 3 4 5 6 7 8 9 10 11

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	3B		UINT8	
2-3	Pinning speed	0002		UINT16	Km/Hr
4-5	Pinning cnt	000A		UINT16	second
6-7	Unpinning speed	0008		UINT16	Km/Hr
8-9	Unpinning cnt	002D		UINT16	second
10-11	Unpinning distance	01F4		UINT16	meter
12	Attributes	01	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 12 bytes					

## SET GPS EPHEMERIS – Set GPS ephemeris to GNSS receiver (0x41)

This is a request message which is issued from the host to GNSS receiver to set GPS ephemeris data (open an ephemeris file) to GNSS receiver. The GNSS receiver should respond with an ACK when succeeded and should respond with a NACK when failed. The payload length is 87 bytes.

Structure:

<0xA0,0xA1>< PL><41>< message body><CS><0x0D,0x0A>

Example:

```
A0 A1 00 57 41 00 02 00 77 88 04 61 10 00 00 00 00 00 00 00 00 00 00 00 DB DF 59 A6 00 00 1E
    1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28

0A 47 7C 00 77 88 88 DF FD 2E 35 A9 CD B0 F0 9F FD A7 04 8E CC A8 10 2C A1 0E 22 31 59 A6 74 00
29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60

77 89 0C FF A3 59 86 C7 77 FF F8 26 97 E3 B9 1C 60 59 C3 07 44 FF A6 37 DF F0 B0 2E 0D 0A
61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87
```

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	41		UINT8	
2-3	SV id	0002	Satellite id	UINT16	
4	SubFrameData[0][0]	77	Eph data subframe 1	UINT8	
5	SubFrameData[0][1]	88	Eph data subframe 1	UINT8	
6	SubFrameData[0][2]	04	Eph data subframe 1	UINT8	
7	SubFrameData[0][3]	61	Eph data subframe 1	UINT8	
8	SubFrameData[0][4]	10	Eph data subframe 1	UINT8	
9	SubFrameData[0][5]	00	Eph data subframe 1	UINT8	
10	SubFrameData[0][6]	00	Eph data subframe 1	UINT8	
11	SubFrameData[0][7]	00	Eph data subframe 1	UINT8	
12	SubFrameData[0][8]	00	Eph data subframe 1	UINT8	
13	SubFrameData[0][9]	00	Eph data subframe 1	UINT8	
14	SubFrameData[0][10]	00	Eph data subframe 1	UINT8	
15	SubFrameData[0][11]	00	Eph data subframe 1	UINT8	
16	SubFrameData[0][12]	00	Eph data subframe 1	UINT8	
17	SubFrameData[0][13]	00	Eph data subframe 1	UINT8	
18	SubFrameData[0][14]	00	Eph data subframe 1	UINT8	
19	SubFrameData[0][15]	00	Eph data subframe 1	UINT8	
20	SubFrameData[0][16]	00	Eph data subframe 1	UINT8	
21	SubFrameData[0][17]	DB	Eph data subframe 1	UINT8	

22	SubFrameData[0][18]	DF	Eph data subframe 1	UINT8	
23	SubFrameData[0][19]	59	Eph data subframe 1	UINT8	
24	SubFrameData[0][20]	A6	Eph data subframe 1	UINT8	
25	SubFrameData[0][21]	00	Eph data subframe 1	UINT8	
26	SubFrameData[0][22]	00	Eph data subframe 1	UINT8	
27	SubFrameData[0][23]	1E	Eph data subframe 1	UINT8	
28	SubFrameData[0][24]	0A	Eph data subframe 1	UINT8	
29	SubFrameData[0][25]	47	Eph data subframe 1	UINT8	
30	SubFrameData[0][26]	7C	Eph data subframe 1	UINT8	
31	SubFrameData[0][27]	00	Eph data subframe 1	UINT8	
32~59	SubFrameData[1][0~27]		Eph data subframe 2, same as field 4-31	UINT8	
60-87	SubFrameData[2][0~27]		Eph data subframe 3, same as field 4-31	UINT8	

Payload Length : 87 bytes



**QUERY 1PPS TIMING – Query 1PPS timing of the GNSS receiver (0x44) \*1**

This is a request message which is issued from the host to GNSS receiver to query 1PPS timing information. The GNSS receiver should respond with an ACK along with information of 1PPS timing, “**GNSS 1PPS TIMING, ID: 0xC2**”, when succeeded and should respond with an NACK when failed. The payload length is 1 byte.

Structure:

<0xA0,0xA1>< PL><44>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 01 44 44 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	44		UINT8	
Payload Length : 1 byte					

\*1: supported only in timing mode receivers.

**CONFIGURE 1PPS CABLE DELAY – Configure cable delay of 1PPS timing (0x45)**

This is a request message which will set the cable delay of 1PPS timing to the GNSS receiver. This command is issued from the host to GNSS receiver and GNSS receiver should respond with an ACK or NACK. If value of cable delay is not valid, the GNSS receiver will respond with an NACK. The payload length is 6 bytes.

Structure:

<0xA0,0xA1>< PL><45>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 06 45 00 00 00 00 00 45 0D 0A  
           1 2 3 4 5 6

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	45		UINT8	-
2-5	Cable Delay	00000000	Cable delay adjustment for 1PPS Valid input value -500000~+500000	SINT32	1/100 ns
6	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 6 bytes					

**QUERY 1PPS CABLE DELAY – Query 1PPS cable delay of the GNSS receiver (0x46)**

This is a request message which is issued from the host to GNSS receiver to query 1PPS cable delay. The GNSS receiver should respond with an ACK along with information of 1PPS cable delay, “**GNSS 1PPS CABLE DELAY, ID: 0xBB**”, when succeeded and should respond with an NACK when failed. The payload length is 1 byte.

Structure:

<0xA0,0xA1>< PL><46>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 01 46 46 0D 0A

1

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	46		UINT8	
Payload Length : 1 byte					

**CONFIGURE NMEA TALKER ID – Configure NMEA talker ID of GNSS receiver (0x4B)**

This is a request message which will configure the type of talker ID (GP mode or GN mode) used in the NMEA output. This command is issued from the host to the receiver and the receiver should respond with an ACK or NACK. The payload length is 3 bytes.

Structure:

<0xA0,0xA1>< PL><4B>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 4B 01 01 4B 0D 0A  
           1 2 3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	4B		UINT8	
2	Talker ID type	01	0: GP mode 1: GN mode 2: Auto mode <sup>*1</sup> : according to NMEA 4.11 to combine GNSS system solution to output GN, GP, GL, GA, GB or GI appropriately.	UINT8	
3	Attributes	01	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 3 bytes					

\*1 supported only in NMEA version 4.11

GPS/GLONASS Receiver

Mode 1 Talker ID GN		Mode 2 Talker ID GP	
<b>\$GNGGA</b>	Time, position, and fix related data of the receiver.	<b>\$GPGGA</b>	Time, position, and fix related data of the receiver.
<b>\$GNGLL</b>	Position, time and fix status.	<b>\$GPGLL</b>	Position, time and fix status.
<b>\$GNGSA</b> <b>\$GPGSA</b> <b>\$GLGSA</b>	Used to represent the ID's of satellites which are used for position fix. When both GPS and GLONASS satellites are used in position solution, a \$GNGSA sentence is used for GPS satellites and another \$GNGSA sentence is used for GLONASS satellites. When only GPS satellites are used for position fix, a single \$GPGSA sentence is output. When only GLONASS satellites are used, a single \$GLGSA sentence is output.	<b>\$GPGSA</b> <b>\$GLGSA</b>	Used to represent the ID's of satellites which are used for position fix. When GPS satellites are used for position fix, \$GPGSA sentence is output. When GLONASS satellites are used for position fix, \$GLGSA sentence is output.
<b>\$GPGSV</b> <b>\$GLGSV</b>	Satellite information about elevation, azimuth and CNR, \$GPGSV is used for GPS satellites, while \$GLGSV is used for GLONASS satellites	<b>\$GPGSV</b> <b>\$GLGSV</b>	Satellite information about elevation, azimuth and CNR, \$GPGSV is used for GPS satellites, while \$GLGSV is used for GLONASS satellites
<b>\$GNRMC</b>	Time, date, position, course and speed data.	<b>\$GPRMC</b>	Time, date, position, course and speed data.
<b>\$GNVTG</b>	Course and speed relative to the ground.	<b>\$GPVTG</b>	Course and speed relative to the ground.
<b>\$GNZDA</b>	UTC, day, month and year and time zone.	<b>\$GPZDA</b>	UTC, day, month and year and time zone.

GPS/Beidou Receiver

Mode 1 Talker ID GN		Mode 2 Talker ID GP	
<b>\$GNGGA</b>	Time, position, and fix related data of the receiver.	<b>\$GPGGA</b>	Time, position, and fix related data of the receiver.
<b>\$GNGLL</b>	Position, time and fix status.	<b>\$GPGLL</b>	Position, time and fix status.
<b>\$GNGSA</b> <b>\$GPGSA</b> <b>\$BDGSA</b>	Used to represent the ID's of satellites which are used for position fix. When both GPS and Beidou satellites are used in position solution, a \$GNGSA sentence is used for GPS satellites and another \$GNGSA sentence is used for Beidou satellites. When only GPS satellites are used for position fix, a single \$GPGSA sentence is output. When only Beidou satellites are used, a single \$BDGSA sentence is output.	<b>\$GPGSA</b> <b>\$BDGSA</b>	Used to represent the ID's of satellites which are used for position fix. When GPS satellites are used for position fix, \$GPGSA sentence is output. When Beidou satellites are used for position fix, \$BDGSA sentence is output.
<b>\$GPGSV</b> <b>\$BDGSV</b>	Satellite information about elevation, azimuth and CNR, \$GPGSV is used for GPS satellites, while \$BDGSV is used for Beidou satellites	<b>\$GPGSV</b> <b>\$BDGSV</b>	Satellite information about elevation, azimuth and CNR, \$GPGSV is used for GPS satellites, while \$BDGSV is used for Beidou satellites
<b>\$GNRMC</b>	Time, date, position, course and speed data.	<b>\$GPRMC</b>	Time, date, position, course and speed data.
<b>\$GNVTG</b>	Course and speed relative to the ground.	<b>\$GPVTG</b>	Course and speed relative to the ground.
<b>\$GNZDA</b>	UTC, day, month and year and time zone.	<b>\$GPZDA</b>	UTC, day, month and year and time zone.

**QUERY NMEA TALKER ID – Query NMEA talker ID of GNSS receiver (0x4F)**

This is a request message which is issued from the host to GNSS receiver to query the talker ID. The GNSS receiver should respond with an ACK along with information of talker ID, “**GNSS NMEA TALKER ID, ID: 0x93**”, when succeeded and should respond with an NACK when failed. The payload length is 1 byte.

Structure:

<0xA0,0xA1>< PL><4F>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 01 4F 4F 0D 0A

1

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	4F		UINT8	
Payload Length : 1 byte					

**CONFIGURE 1PPS TIMING – Configure 1PPS timing of the GNSS receiver (0x54)\*1**

This is a request message which will configure 1PPS timing of the GNSS receiver. This command is issued from the host to GNSS receiver and GNSS receiver should respond with an ACK or NACK. If value of survey length is not valid, the GPS receiver will respond with an NACK. The payload length is 31 bytes.

Structure:

<0xA0,0xA1>< PL><54>< message body><CS><0x0D,0x0A>

Example:

```
A0 A1 00 1F 54 00 00 00 07 D0 00 00 00 1E 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
    1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27

00 00 00 01 9C 0D 0A
28 29 30 31
```

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	54		UINT8	-
2	Timing Mode	00	00 = Timing PVT Mode 01 = Timing Survey Mode 02 = Timing Static Mode	UINT8	
3-6	Survey Length	000007D0	Survey length when in Timing Survey Mode not used when in other mode. Valid values between 60~1209600	UINT32	
7-10	Standard Deviation	0000001E	Standard Deviation when in Timing Survey Mode not used when in other mode. Valid values between 3~100	UINT32	
11-18	Latitude	0000000000000000	Latitude in double in Timing Static Mode not used when in other mode.	DPFP	
19-26	Longitude	0000000000000000	Longitude in double in Timing Static Mode not used when in other mode.	DPFP	
27-30	Altitude	00000000	Altitude in float in Timing Static Mode not used when in other mode.	SPFP	
31	Attributes	01	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 31 bytes					

\*1: supported only in timing mode receivers.

**Remark:**

When using PVT Mode, precision 1PPS won't be generated with less than 4 satellites.

When using Survey Mode, survey length need to be given, the receiver will survey its location for number of specified points, and then change to Static Mode such that precision 1PPS will still be generated with 1 satellite in view.

Use Static Mode when location is known, latitude/longitude/altitude need to be set, and receiver will generate precision 1PPS output down to 1 satellite in view.

For attribute setting specifying "update to SRAM", it will make the setting take effect in the current session. Later if the receiver is turned off and SRAM / RTC backup supply source is still provided, then upon power up receiver will go into survey process if Survey Mode was chosen, or pinned to a fixed location if Static Mode was chosen. If without backup supply source and recycling power, the receiver will start in the default Survey Mode.

For attribute setting specifying "update to both SRAM and Flash", it will make the setting take effect in the current session. Later if the receiver is turned off then upon power up receiver will go into survey process if Survey Mode was chosen, or pinned to a fixed location if Static Mode was chosen.



**CONFIGURE 1PPS OUTPUT MODE – Configure 1PPS output mode of the GNSS receiver (0x55)<sup>\*1</sup>**

This is a request message which will configure 1PPS output mode of the GNSS receiver. This command is issued from the host to GNSS receiver and GNSS receiver should respond with an ACK or NACK. The payload length is 4 bytes.

Structure:

<0xA0,0xA1>< PL><55>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 04 55 00 00 01 54 0D 0A  
          1 2 3 4

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	55		UINT8	-
2	Output Mode	00	00 = No output 01 = Output if GNSS time is available 02 = Output always and align to GNSS time automatically	UINT8	
3	Align Source	00	00 = Align to GNSS 01 = Align to UTC	UINT8	
4	Attributes	01	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 4 bytes					

\*1: supported only in timing mode receivers.

**QUERY 1PPS OUTPUT MODE – Query 1PPS output mode of the GNSS receiver (0x56) \*1**

This is a request message which is issued from the host to GNSS receiver to query 1PPS output mode. The GNSS receiver should respond with an ACK along with information of 1PPS output mode, “**GNSS 1PPS OUTPUT MODE, ID: 0xC3**”, when succeeded and should respond with an NACK when failed. The payload length is 1 byte.

Structure:

<0xA0,0xA1>< PL><56>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 01 56 56 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	56		UINT8	
Payload Length : 1 byte					

\*1: supported only in timing mode receivers.

**GET GLONASS EPHEMERIS – GET GLONASS EPHEMERIS USED OF THE GNSS RECEIVER (0X5B)**

This is a request message which is issued from the host to the receiver to retrieve GLONASS ephemeris data. The receiver should respond with an ACK along with information of ephemeris, “**GLONASS EPHEMERIS DATA, ID: 0x90**”, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><5B>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 5B 01 5A 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	5B		UINT8	
2	GLONASS SV slot number	01	0: means all SVs 1~32 : mean for the particular SV	UINT8	
Payload Length : 2 bytes					

**SET GLONASS EPHEMERIS – Set GLONASS ephemeris to the GNSS receiver (0x5C)**

This is a request message which is issued from the host to the receiver to set GLONASS ephemeris data (open an ephemeris file) to the receiver. The receiver should respond with an ACK when succeeded and should respond with a NACK when failed. The payload length is 43 bytes.

Structure:

<0xA0,0xA1>< PL><5C>< message body><CS><0x0D,0x0A>

Example:

```
A0 A1 00 2B 5C 01 01 01 07 43 0F AC 06 89 A2 01 9A 02 17 60 28 75 47 01 16 FE B5 03 80 06 9C CB
    1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28

CC 92 6A C0 42 04 09 94 79 20 00 00 20 11 85 2F 0D 0A
29 30 31 32 33 34 35 36 37 38 39 40 41 42 43
```

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	5C		UINT8	
2	Slot number	01	GLONASS SV slot number	UINT8	
3	K number	01	GLONASS SV frequency number (-7 ~ +6)	SINT8	
4	glo_eph_data0_byte0	01	Stuffing zeros and bit 85 - bit 81 (LSB) of string 1	UINT8	
5	glo_eph_data0_byte1	07	bit 80 (MSB)- bit 73 (LSB) of string 1	UINT8	
6	glo_eph_data0_byte2	43	bit 72 (MSB)- bit 65 (LSB) of string 1	UINT8	
7	glo_eph_data0_byte3	0F	bit 64 (MSB)- bit 57 (LSB) of string 1	UINT8	
8	glo_eph_data0_byte4	AC	bit 56 (MSB)- bit 49 (LSB) of string 1	UINT8	
9	glo_eph_data0_byte5	06	bit 48 (MSB)- bit 41 (LSB) of string 1	UINT8	
10	glo_eph_data0_byte6	89	bit 40 (MSB)- bit 33 (LSB) of string 1	UINT8	
11	glo_eph_data0_byte7	A2	bit 32 (MSB)- bit 25 (LSB) of string 1	UINT8	
12	glo_eph_data0_byte8	01	bit 24 (MSB)- bit 17 (LSB) of string 1	UINT8	
13	glo_eph_data0_byte9	9A	bit 16 (MSB)- bit 09 (LSB) of string 1	UINT8	
14	glo_eph_data1_byte0	02	Stuffing zeros and bit 85 - bit 81 (LSB) of string 2	UINT8	
15	glo_eph_data1_byte1	17	bit 80 (MSB)- bit 73 (LSB) of string 2	UINT8	
16	glo_eph_data1_byte2	60	bit 72 (MSB)- bit 65 (LSB) of string 2	UINT8	
17	glo_eph_data1_byte3	28	bit 64 (MSB)- bit 57 (LSB) of string 2	UINT8	
18	glo_eph_data1_byte4	75	bit 56 (MSB)- bit 49 (LSB) of string 2	UINT8	

19	glo_eph_data1_byte5	47	bit 48 (MSB)- bit 41 (LSB) of string 2	UINT8	
20	glo_eph_data1_byte6	01	bit 40 (MSB)- bit 33 (LSB) of string 2	UINT8	
21	glo_eph_data1_byte7	16	bit 32 (MSB)- bit 25 (LSB) of string 2	UINT8	
22	glo_eph_data1_byte8	FE	bit 24 (MSB)- bit 17 (LSB) of string 2	UINT8	
23	glo_eph_data1_byte9	B5	bit 16 (MSB)- bit 09 (LSB) of string 2	UINT8	
24-33	glo_eph_data2_byte0 - glo_eph_data2_byte9		Stuffing-zeros and bit 85 - bit 09 of string 3		
34-43	glo_eph_data3_byte0 - glo_eph_data3_byte9		Stuffing-zeros and bit 85 - bit 09 of string 4		
Payload Length : 43 bytes					

**GET GLONASS TIME CORRECTION PARAMETERS – Get GLONASS time correction parameters (0x5F)**

This is a request message which is issued from the host to the receiver to retrieve GLONASS time correction data. The receiver should respond with an ACK along with information of time correction, “**GLONASS TIME CORRECTION, ID: 0x92**”, when succeeded and should respond with an NACK when failed. The payload length is 1 byte.

Structure:

<0xA0,0xA1>< PL><5F>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 5F 5F 0D 0A  
1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	5F		UINT8	
Payload Length : 1 byte					

**SET GLONASS TIME CORRECTION PARAMETERS – Set GLONASS time correction parameters to the GNSS receiver (0x60)**

This is a request message which is issued from the host to the receiver to set GLONASS time correction data ( $\tau_{GPS}$  and  $\tau_C$ ) to the receiver. The receiver should respond with an ACK when succeeded and should respond with an NACK when failed. The payload length is 10 bytes.

Structure:

<0xA0,0xA1>< PL><60>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 0A 60 FF FF FF BF 00 00 00 14 00 34 0D 0A  
           1  2  3  4  5  6  7  8  9 10

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	60		UINT8	
2-5	$\tau_C$	FFFFFFBF	GLONASS time scale correction to UTC(SU) time	SINT32	$2^{-31}$ sec
6-9	$\tau_{GPS}$	00000014	Correction to GPS time relative to GLONASS time	SINT32	$2^{-30}$ sec
10	attributes	00	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 10 bytes					

# MESSAGES WITH Sub-ID\*1

\*1: Message ID with range from 0x60~0x6F contains both input and output messages.

## CONFIGURE SBAS – Configure SBAS parameters of GNSS receiver (ID: 0x62, SID: 0x1)

This is a request message which is issued from the host to GNSS receiver to configure SBAS parameters. The GNSS receiver should respond with an ACK when succeeded and should respond with an NACK when failed. The payload length is 9 bytes.

Structure:

<0xA0,0xA1>< PL><62><01>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 09 62 01 01 01 08 01 03 07 00 6E 0D 0A  
 1 2 3 4 5 6 7 8 9

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	62		UINT8	
2	Message Sub-ID	01		UINT8	
3	Enable	01	0: disable SBAS system 1: enable SBAS system	UINT8	
4	Ranging	01	0: do not use SBAS satellite for navigation 1: use SBAS satellite for navigation 2: auto mode determined by receiver whether ranging will use or not*1	UINT8	
5	Ranging URA Mask	08	Default:8, range 0~15	UINT8	
6	Correction	01	0: disable the correction 1: enable the correction	UINT8	
7	Number of tracking channels	03	Value: 0~3 Set how many channels are reserved for SBAS tracking	UINT8	
8	Subsystem mask	07	Allows selectively enabling/disabling SBAS satellites Bit0: WAAS, 1: enable; 0: disable Bit1: EGNOS, 1: enable; 0: disable Bit2: MSAS, 1: enable; 0: disable Bit3: GAGAN, 1: enable; 0: disable	UINT8	



			Bit7: All SBAS PRN 120~138 <sup>*1</sup>		
9	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 9 bytes					

**QUERY SBAS STATUS – Query SBAS status of GNSS receiver (ID: 0x62, SID: 0x2)**

This is a request message which is issued from the host to GNSS receiver to query SBAS status. The GNSS receiver should respond with an ACK along with SBAS status, “**SBAS STATUS, ID: 0x62, SID: 0x80**”, when succeeded and should respond with an NACK when failed. The payload length is 2 byte.

Structure:

<0xA0,0xA1>< PL><62><02>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 62 02 60 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	62		UINT8	
2	Message Sub-ID	02		UINT8	
Payload Length : 2 byte					

**CONFIGURE QZSS – Configure QZSS of GNSS receiver (ID: 0x62, SID: 0x3)**

This is a request message which is issued from the host to GNSS receiver to configure QZSS parameters. The GNSS receiver should respond with an ACK when succeeded and should respond with an NACK when failed. The payload length is 5 bytes.

Structure:

<0xA0,0xA1>< PL><62><03>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 05 62 03 01 03 00 63 0D 0A  
           1 2 3 4 5

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	62		UINT8	
2	Message Sub-ID	03		UINT8	
3	Enable	01	0: disable QZSS system 1: enable QZSS system	UINT8	
4	Number of tracking channels	03	Value: 1~3 Set how many channels are used for QZSS tracking, default: 1	UINT8	
5	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 5 bytes					

**QUERY QZSS STATUS – Query QZSS status of GNSS receiver (ID: 0x62, SID: 0x4)**

This is a request message which is issued from the host to GNSS receiver to query QZSS status. The GNSS receiver should respond with an ACK along with QZSS status, “**QZSS STATUS, ID: 62, SID: 0x81**”, when succeeded and should respond with an NACK when failed. The payload length is 2 byte.

Structure:

<0xA0,0xA1>< PL><62><04>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 62 04 66 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	62		UINT8	
2	Message Sub-ID	04		UINT8	
Payload Length : 2 byte					

**SBAS STATUS – SBAS status of GNSS receiver (ID: 0x62, SID: 0x80)**

This is a response message to “**QUERY SBAS STATUS, ID: 0x62, SID: 0x2**” which provides the SBAS status of GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 8 bytes.

Structure:

<0xA0,0xA1>< PL><62><80>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 08 62 80 01 01 08 01 03 07 EF 0D 0A  
           1  2  3  4  5  6  7  8

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	62		UINT8	
2	Message Sub-ID	80		UINT8	
3	Enable	01	0: disable SBAS system 1: enable SBAS system	UINT8	
4	Ranging	01	0: do not use SBAS satellite for navigation 1: use SBAS satellite for navigation 2: auto mode determined by receiver**1	UINT8	
5	Ranging URA Mask	08	Range 0~15 default 8	UINT8	
6	Correction	01	0: disable the correction 1: enable the correction	UINT8	
7	Number of tracking channels	03	Value: 0~3 Set how many channels are reserved for SBAS tracking	UINT8	
8	Subsystem mask	07	Allows selectively enabling/disabling SBAS satellites Bit0: WAAS, 1: enable; 0: disable Bit1: EGNOS, 1: enable; 0: disable Bit2: MSAS, 1: enable; 0: disable Bit3: GAGAN, 1: enable; 0: disable Bit7: All SBAS PRN 120~138**1	UINT8	
Payload Length : 8 bytes					

**QZSS STATUS – QZSS status of GNSS receiver (ID: 0x62, SID: 0x81)**

This is a response message to “**QUERY QZSS STATUS, ID: 0x62, SID: 0x4**” which provides the QZSS status of GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 4 bytes.

Structure:

<0xA0,0xA1>< PL><62><81>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 04 62 81 01 03 E1 0D 0A  
          1 2 3 4

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	62		UINT8	
2	Message Sub-ID	81		UINT8	
3	Enable	01	0: disable QZSS system 1: enable QZSS system	UINT8	
4	Number of tracking channels	03	Value: 1~3 Set how many channels are used for QZSS tracking	UINT8	
Payload Length : 4 bytes					

**CONFIGURE SAE – configure SAE of GNSS receiver (ID: 0x63, SID: 0x1)**

This is a request message which is issued from the host to GNSS receiver to configure enable or disable self-aided ephemeris estimation (SAEE). The GNSS receiver should respond with an ACK when succeeded and should respond with a NACK when failed. The payload length is 4 bytes.

Structure:

<0xA0,0xA1>< PL><63><01>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 04 63 01 01 01 62 0D 0A  
           1  2  3  4

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	63		UINT8	
2	Message Sub-ID	01		UINT8	
3	Enable	01	0: SAE mode default ROM version decided by HW power-on latch 1: SAE enable 2: SAE disable	UINT8	
4	Attributes	01	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 4 bytes					

**QUERY SAE STATUS – Query SAE status of GNSS receiver (ID: 0x63, SID: 0x2)**

This is a request message which is issued from the host to GNSS receiver to query self-aided ephemeris estimation (SAEE) status. The GNSS receiver should respond with an ACK along with SAE status, “**SAEE STATUS, ID: 63, SID: 0x80**”, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><63><0x2>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 63 02 61 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	63		UINT8	
2	Message Sub-ID	02		UINT8	
Payload Length : 2 bytes					



**SAEE STATUS – SAE status of GNSS receiver (ID: 0x63, SID: 0x80)**

This is a response message to “**QUERY SAE STATUS, ID: 0x63, SID: 0x2**” which provides the self-aided ephemeris estimation (SAEE) status of GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 3 bytes.

Structure:

<0xA0,0xA1>< PL><63><80>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 63 80 01 E2 0D 0A  
                   1 2 3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	63		UINT8	
2	Message Sub-ID	80		UINT8	
3	Status	01	0: SAE mode default ROM version decided by HW power-on latch 1: SAE enable 2: SAE disable	UINT8	
Payload Length : 3 bytes					

**QUERY GNSS BOOT STATUS – Query boot status of GNSS receiver (ID: 0x64, SID: 0x1)**

This is a request message which is issued from the host to GNSS receiver to query boot status. The GNSS receiver should respond with an ACK along with boot status, “**GNSS BOOT STATUS, ID: 64, SID: 0x80**”, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><64><01>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 64 01 65 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	01		UINT8	
Payload Length : 2 bytes					

**CONFIGURE EXTENDED NMEA MESSAGE INTERVAL – Configure extended NMEA message Interval of GNSS receiver (ID: 0x64, SID: 0x2)**

This is a request message which will set NMEA message interval configuration. This command is issued from the host to GNSS receiver and GNSS receiver should respond with an ACK or NACK. The payload length is 15 bytes.

Structure:

<0xA0,0xA1>< PL><64><02>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 0F 64 02 01 01 03 01 01 01 01 00 00 00 00 01 64 0D 0A  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	02		UINT8	
3	GGA Interval	01	0 ~255, 0: disable	UINT8	second
4	GSA Interval	01	0 ~255, 0: disable	UINT8	second
5	GSV Interval	03	0 ~255, 0: disable	UINT8	second
6	GLL Interval	01	0 ~255, 0: disable	UINT8	second
7	RMC Interval	01	0 ~255, 0: disable	UINT8	second
8	VTG Interval	01	0 ~255, 0: disable	UINT8	second
8	ZDA Interval	01	0 ~255, 0: disable	UINT8	second
10	GNS Interval	00	0 ~255, 0: disable	UINT8	second
11	GBS Interval	00	0 ~255, 0: disable	UINT8	second
12	GRS Interval	00	0 ~255, 0: disable	UINT8	second
13	DTM Interval	00	0 ~255, 0: disable	UINT8	second
14	GST Interval	00	0 ~255, 0: disable	UINT8	second
15	Attributes	01	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 15 bytes					

**QUERY EXTENDED NMEA MESSAGE INTERVAL – Query extended NMEA message interval of GNSS receiver (ID: 0x64, SID: 0x3)**

This is a request message which is issued from the host to GNSS receiver to query extended nmea message interval. The GNSS receiver should respond with an ACK along with nmea message interval, “**EXTENDED NMEA MESSAGE INTERVAL, ID: 0x64, SID: 0x81**”, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><64><03><CS><0x0D,0x0A>

Example:

A0 A1 00 02 64 03 67 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	03		UINT8	
Payload Length : 2 bytes					

**CONFIGURE INTERFERENCE DETECTION – Configure the interference detection of GNSS receiver (ID: 0x64, SID: 0x6)**

This is a request message which is issued from the host to GNSS receiver to configure interference detect control. The GNSS receiver should respond with an ACK when succeeded and should respond with an NACK when failed. The payload length is 4 bytes.

Structure:

<0xA0,0xA1>< PL><64><06>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 04 64 06 01 00 63 0D 0A  
           1 2 3 4

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	06		UINT8	
3	Interference Detect Control	01	0: disable 1: enable	UINT8	
4	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 4 bytes					

**QUERY INTERFERENCE DETECTION STATUS – Query the status of interference detection of the GNSS receiver (ID: 0x64, SID: 0x7)**

This is a request message which is issued from the host to GNSS receiver to query interference detection status. The GNSS receiver should respond with an ACK along with information of interference detection status, **“INTERFERENCE DETECTION STATUS, ID: 0x64, SID: 0x83”**, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><64><07>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 64 07 63 0D 0A  
                   1  2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	07		UINT8	
Payload Length : 2 bytes					

**CONFIGURE GPS PARAMETER SEARCH ENGINE NUMBER – Configure the parameter search engine number of GPS receiver (ID: 0x64, SID: 0xA) \*1**

This is a request message which is issued from the host to GPS receiver to configure the number of the parameter search engine. The GPS receiver should respond with an ACK when succeeded and should respond with an NACK when failed. The payload length is 4 bytes.

Structure:

<0xA0,0xA1>< PL><64><0A>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 04 64 0A 01 01 6E 0D 0A  
           1 2 3 4

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	0A		UINT8	
3	Search engine number	01	0: PSE_MODE_DEFAULT ROM version decided by HW power-on latch, FLASH version : by SW define 1: PSE_MODE_LOW (2 PSE) 2: PSE_MODE_MID (4 PSE) 3: PSE_MODE_HIGH (6 PSE) 4: PSE_MODE_FULL (8 PSE)	UINT8	
4	Attributes	01	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 4 bytes					

\*1: Supported for GPS single-mode receivers

**QUERY GPS PARAMETER SEARCH ENGINE NUMBER – Query the parameter search engine number of the GPS receiver (ID: 0x64, SID: 0xB)**

This is a request message which is issued from the host to GPS receiver to query parameter search engine number. The GPS receiver should respond with an ACK along with information of GPS parameter search engine number, **“GPS PARAMETER SEARCH ENGINE NUMBER, ID 0x64, SID 0xB”**, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><64><0B>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 64 0B 6F 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	0B		UINT8	
Payload Length : 2 bytes					



**CONFIGURE POSITION FIX NAVIGATION MASK – Configure the position fix navigation mask of GNSS receiver (ID: 0x64, SID: 0x11)**

This is a request message which is issued from the host to GNSS receiver to configure the 2D or 3D position fix navigation mask. The GNSS receiver should respond with an ACK when succeeded and should respond with an NACK when failed. The payload length is 5 bytes.

Structure:

<0xA0,0xA1>< PL><64><11>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 05 64 11 00 00 00 75 0D 0A  
           1  2  3  4  5

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	11		UINT8	
3	First fix navigation mask	00	0: 3D 1: 2D	UINT8	
4	Subsequent fix navigation mask	00	0: 3D 1: 2D	UINT8	
5	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 5 bytes					

**QUERY POSITION FIX NAVIGATION MASK – Query the position fix navigation mask of GNSS receiver (ID: 0x64, SID: 0x12)**

This is a request message which is issued from the host to GNSS receiver to query position fix navigation mask. The GNSS receiver should respond with an ACK along with information of navigation mask **“POSITION FIX NAVIGATION MASK, ID: 0x64, SID: 0x88”**, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><64><12>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 64 12 76 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	12		UINT8	
Payload Length : 2 bytes					

**CONFIGURE UTC REFERENCE TIME SYNC TO GPS TIME – Configure the UTC reference time to GPS receiver to synchronize to GPS time (ID: 0x64, SID: 0x15) <sup>\*1</sup>**

This is a request message which is issued from the host to GPS receiver to configure the UTC reference time that is used to synchronize to GPS time. The GPS receiver should respond with an ACK when succeeded and should respond with an NACK when failed. The payload length is 8 bytes.

Structure:

<0xA0,0xA1>< PL><64><15>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 04 64 15 01 07 DD 01 01 00 AA 0D 0A  
           1  2  3  4  5  6  7  8

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	15		UINT8	
3	Enable	01	0: Disable 1: Enable	UINT8	
4-5	UTC Year	07DD	UTC year	UINT16	
6	UTC Month	01	UTC month	UINT8	
7	UTC Day	01	UTC day	UINT8	
8	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 8 bytes					

\*1

The time of week is transmitted by GPS satellites, but only the bottom 10 bits of the week number are transmitted. This means valid range is from 0 to 1023, until it reaches 1023 after which it will "roll over" back to zero. The 1st week rollover occurred in 1999 and the 2nd will be in 2019.

How to decide default week rollover times?

SkyTraq receivers solve this problem by assuming that all week numbers must be at least as large as a reference rollover week number. This reference rollover week number is hard-coded into the firmware at compile time and is normally set a few weeks before the software is completed, but it can be adjusted by command "Configure UTC Reference Time Sync to GPS Time".

For example :

User just input reasonable UTC time they want, SkyTraq receivers will transform this reference time to proper week

rollover times automatically.

It is important to set the reference rollover week number appropriately when supplying SkyTraq receivers with simulated signals, especially when the scenarios are in the past.

**QUERY UTC REFERENCE TIME SYNC TO GPS TIME – Query the UTC reference time of GPS receiver set to synchronize to GPS time (ID: 0x64, SID: 0x16)**

This is a request message which is issued from the host to GPS receiver to query UTC reference time of GPS receiver that set to synchronize to GPS time. The GPS receiver should respond with an ACK along with GPS UTC reference time, **“GPS UTC REFERENCE TIME, ID: 0x64, SID: 0x8A”**, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><64><16>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 64 16 72 0D 0A  
           1  2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	16		UINT8	
Payload Length : 2 bytes					

**CONFIGURE GNSS NAVIGATION MODE – Configure the navigation mode of GNSS receiver (ID: 0x64, SID: 0x17)**

This is a request message which is issued from the host to GNSS receiver to configure the system navigation mode. The GNSS receiver should respond with an ACK when succeeded and should respond with an NACK when failed. The payload length is 4 bytes.

Structure:

<0xA0,0xA1>< PL><64><17>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 04 64 17 00 00 73 0D 0A  
                   1 2 3 4

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	17		UINT8	
3	Navigation mode	00	0: auto 1: pedestrian 2: car 3: marine 4: balloon 5: airborne	UINT8	
4	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 4 bytes					

**QUERY GNSS NAVIGATION MODE – Query the navigation mode of GNSS receiver (ID: 0x64, SID: 0x18)**

This is a request message which is issued from the host to GNSS receiver to query navigation mode. The GNSS receiver should respond with an ACK along with navigation mode, “**GNSS NAVIGATION MODE, ID: 0x64, SID: 0x8B**”, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><64><18>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 64 18 7C 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	18		UINT8	
Payload Length : 2 bytes					

**CONFIGURE GNSS CONSTELLATION TYPE FOR NAVIGATION SOLUTION – Set the GNSS constellation type for navigation solution (ID: 0x64, SID: 0x19)**

This is a request message which is issued from the host to GNSS receiver to configure the GNSS constellation type for navigation solution. The GNSS receiver should respond with an ACK when succeeded and should respond with an NACK when failed. The payload length is 5 bytes.

Structure:

<0xA0,0xA1>< PL><64><19>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 05 64 19 00 09 00 74 0D 0A  
           1 2 3 4 5

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	19		UINT8	
3-4	Constellation Type	00 09	Bit 0: GPS Bit 1: Glonass Bit 2: Galileo Bit 3: Beidou Bit 4: Navic	UINT16	
5	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 5 bytes					



**QUERY GNSS CONSTELLATION TYPE FOR NAVIGATION SOLUTION – Query the GNSS constellation type for navigation solution (ID: 0x64, SID: 0x1A)**

This is a request message which is issued from the host to GNSS receiver to query GNSS constellation type for navigation solution. The GNSS receiver should respond with an ACK along with constellation type, “**GNSS CONSTELLATION TYPE FOR NAVIGATION SOLUTION, ID 0x64, SID 0x8C**”, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><64><1A>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 64 1A 7E 0D 0A  
1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	1A		UINT8	
Payload Length : 2 bytes					

**SOFTWARE IMAGE DOWNLOAD USING ROM EXTERNAL LOADER – Download software image to system flash using ROM external loader (ID: 0x64, SID: 0x1B)<sup>\*1</sup>**

This is a request message which is issued from the host to GNSS receiver to download image to system flash using ROM external loader when download from ROM to Flash. The GNSS receiver should respond with an ACK when succeeded and should respond with an NACK when failed. The payload length is 7 bytes.

Structure:

<0xA0,0xA1>< PL><64><1B>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 06 64 1B 07 00 00 00 00 78 0D 0A  
           1  2  3  4  5  6  7

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	1B		UINT8	
3	Baud	07	0: 4800 1: 9600 2: 19200 3: 38400 4: 57600 5: 115200 6: 230400 7: 460800 8: 921600	UINT8	
4	Flash Type	00	0: default, auto 1: QSPI Winbond 2. QSPI EON 3: Parallel Flash NUMONYX 4. Parallel Flash EON	UINT8	
5-6	Flash ID	0000	If field 3 is not 0, then need to specify the flash ID	UINT16	
7	Buffer Used Index	00	0:8k 1:16K 2:24K 3:32K	UINT8	
Payload Length : 7 bytes					

\*1 Please refer to SkyTraq software image download application notes and API.

**CONFIGURE GPS/UTC LEAP SECONDS – Configure GPS/UTC leap seconds of GNSS receiver (ID: 0x64, SID: 0x1F)**

This is a request message which is issued from the host to GNSS receiver to configure GPS/UTC leap seconds. The GNSS receiver should respond with an ACK when succeeded and should respond with a NACK when failed. The payload length is 4 bytes.

Structure:

<0xA0,0xA1>< PL><64><1F>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 04 64 1F 10 01 6A 0D 0A  
           1 2 3 4

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub ID	1F		UINT8	
3	Leap seconds	10	Leap seconds	SINT8	
4	Attributes	01	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 4 bytes					

**QUERY GPS TIME – Query GPS time of GNSS receiver (ID: 0x64, SID: 0x20)**

This is a request message which is issued from the host to GNSS receiver to query GPS time. The GNSS receiver should respond with an ACK along with GPS time, "**GPS TIME, ID: 0x64, SID: 0x8E**", when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><64><0x20>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 64 20 44 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub ID	20		UINT8	
Payload Length : 2 bytes					

**CONFIGURE PSTI MESSAGE INTERVAL – Configure PSTI message interval of GNSS receiver (ID: 0x64, SID: 0x21)**

This is a request message which will set PSTI message interval of certain PSTI message ID to the GNSS receiver. This command is issued from the host to GNSS receiver and GNSS receiver should respond with an ACK or NACK. The payload length is 5 bytes. On one condition that firmware does not support certain PSTI ID, the GNSS receiver will reply NACK.

Structure:

<0xA0,0xA1>< PL><64><21>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 05 64 21 1E 01 01 5B 0D 0A  
           1  2  3  4  5

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	21		UINT8	
3	PSTI ID <sup>*1</sup>	1E	PSTI ID of SkyTraq proprietary message Ex. A value equals 4 (hex, 0x04) corresponding to PSTI,004. Ex. A value equals 30 (hex 0x1E) corresponding to PSTI,030	UINT8	
4	Message Interval	01	0: disable 1~255: interval or enable	UINT8	
5	Attributes	01	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 5 bytes					

\*1 PSTI ID list

- PSTI ID 5: time stamp proprietary message.
- PSTI ID 7: geofencing proprietary message.
- PSTI, ID 20: dead reckoning proprietary message.
- PSTI ID 30, 32, 33: RTK proprietary messages.

**QUERY PSTI MESSAGE INTERVAL – Query PSTI message interval of GNSS receiver (ID: 0x64, SID: 0x22)**

This is a request message which is issued from the host to GNSS receiver to query PSTI message interval of certain PSTI message ID. The GNSS receiver should respond with an ACK along with PSTI message interval, “**PSTI MESSAGE INTERVAL, ID 0x64, SID 0x8F**”, when succeeded and should respond with an NACK when failed. The payload length is 3 bytes.

Structure:

<0xA0,0xA1>< PL><64><22>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 64 22 1E 58 0D 0A  
                   1 2 3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	22		UINT8	
3	Message ID <sup>*1</sup>	1E	SkyTraq proprietary message ID Ex. A value equals 4 (hex, 0x04) corresponding to PSTI,004.  Ex. A value equals 30 (hex 0x1E) corresponding to PSTI,030	UINT8	
Payload Length : 3 bytes					

\*1 PSTI ID list

PSTI ID 5: time stamp proprietary message.

PSTI ID 7: geofencing proprietary message.

PSTI, ID 20: dead reckoning proprietary message.

PSTI ID 30, 32, 33: RTK proprietary messages.

**CONFIGURE GNSS DATUM INDEX – Configure the datum index of GNSS receiver (ID: 0x64, SID: 0x27)**

This is a request message which is issued from the host to configure the datum index to GNSS receiver. The GNSS receiver should respond with an ACK when succeeded and should respond with a NACK when failed. The payload length is 5 bytes.

Structure:

<0xA0,0xA1>< PL><64><27>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 64 27 00 DC 01 9E 0A  
1 2 3 4 5

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	27		UINT8	
3-4	Datum index	00DC	Datum index, range 0~220. Please refer to Appendix B.	UINT16	
5	Attributes	01	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 5 bytes					



**QUERY GNSS DATUM INDEX – Query the datum index of the GNSS receiver (ID: 0x64, SID: 0x28)**

This is a request message which is issued from the host to GNSS receiver to query datum index. The GNSS receiver should respond with an ACK along with information of datum index **“GNSS DATUM INDEX, ID: 0x64, SID: 0x92”**, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><64><28>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 64 28 4C 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	28		UINT8	
Payload Length : 2 bytes					

**QUERY VERSION EXTENSION STRING – Query version extension string of GNSS receiver (ID: 0x64, SID: 0x7D)**

This is a request message which is issued from the host to GNSS receiver to query version extension string. The GNSS receiver should respond with an ACK along with version extension string, “**VERSION EXTENSION STRING, ID: 0x64, SID: 0xFE**”, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><64><0x7D>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 64 7D 19 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub ID	7D		UINT8	
Payload Length : 2 bytes					

**CONFIGURE GNSS GEO-FENCING DATA BY POLYGON – Configure geo-fencing data by polygon to GNSS receiver (ID: 0x64, SID: 0x34)**

This is a request message which is issued from the host to configure the geo-fencing data by polygon to GNSS receiver. The GNSS receiver should respond with an ACK when succeeded and should respond with a NACK when failed. The payload length is maximum 261 bytes.

Structure:

<0xA0,0xA1>< PL><64><34>< message body><CS><0x0D,0x0A>

Example:

```
A0 A1 00 45 64 34 00 01 04 40 38 C8 E5 BF 18 FC 73 40 5E 40 90 38 79 65 94 40 38 C8 E9 C1 87 15
   1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28

D6 40 5E 40 92 D5 3D 3C 54 40 38 C8 F1 8D 47 37 07 40 5E 40 92 24 BC 08 40 40 38 C8 ED 64 06 8F
 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60

BC 40 5E 40 8F 70 E0 2B BE B9 0D 0A
 61 62 63 64 65 66 67 68 69
```

Field	Name	Example (hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	34		UINT8	
3	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
4	Polygon	01	Polygon index, range: 1~4.	UINT8	
5	Number of points	04	Number of points of a polygon Maximum number: 16	UINT8	
6-13	Latitude	4038C8E5 BF18FC73	Latitude in double of polygon points #1	DPFP	degree
14-21	Longitude	405E4090 38796594	Longitude in double of polygon points #1	DPFP	degree
22-29	Latitude	4038C8E9 C18715D6	Latitude in double of polygon points #2	DPFP	degree
30-37	Longitude	405E4092 D53D3C54	Longitude in double of polygon points #2	DPFP	degree
38-45	Latitude	4038C8F1	Latitude in double of polygon points #3	DPFP	degree

		8D473707			
46-53	Longitude	405E4092 24BC0840	Longitude in double of polygon points #3	DPFP	degree
54-61		4038C8ED 64068FBC	Latitude in double of polygon points #4	DPFP	degree
62-69		405E408F 70E02BBE	Longitude in double of polygon points #4	DPFP	degree
....					
6+((ndx-1)*16) ~ 13+((ndx-1)*16)	Latitude		Latitude in double of polygon points #ndx	DPFP	degree
14+((ndx-1)*16) ~ 21+((ndx-1)*16)	Longitude		Longitude in double of polygon points #ndx	DPFP	degree
Payload Length : maximum 261 bytes, ndx = number of polygon points, maximum 16 points of each polygon					

**QUERY GNSS GEO-FENCING DATA BY POLYGON – Query geo-fencing data by polygon of the GNSS receiver (ID: 0x64, SID: 0x35)**

This is a request message which is issued from the host to GNSS receiver to query geo-fencing data. The GNSS receiver should respond with an ACK along with geo-fencing data **“GNSS GEO-FENCING DATA BY POLYGON, ID: 0x64, SID: 0x99”**, when succeeded and should respond with an NACK when failed. The payload length is 3 bytes.

Structure:

<0xA0,0xA1>< PL><64><35>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 64 35 01 50 0D 0A  
           1 2 3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	35		UINT8	
3	Polygon	01	Polygon index, range: 1~4	UINT8	
Payload Length : 3 bytes					

**QUERY GNSS MULTI-POLYGON GEO-FENCING RESULT – Query multi-polygon geo-fencing result of the GNSS receiver (ID: 0x64, SID: 0x36)**

This is a request message which is issued from the host to GNSS receiver to query multi-polygon geo-fencing result. The GNSS receiver should respond with an ACK along with information of geo-fencing result **“GNSS MULTI-POLYGON GEO-FENCING RESULT, ID: 0x64, SID: 0x9A”**, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><64><36>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 64 36 52 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	36		UINT8	
Payload Length : 2 bytes					

**CONFIGURE NMEA STRING INTERVAL – Configure NMEA string Interval of GNSS receiver (ID: 0x64, SID: 0x3B)**

This is a request message which will set NMEA string interval configuration. This command is issued from the host to GNSS receiver and GNSS receiver should respond with an ACK or NACK. The payload length is 7 bytes.

Structure:

<0xA0,0xA1>< PL><64><3B>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 07 64 3B 47 47 41 01 01 1E 0D 0A  
           1 2 3 4 5 6 7

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	3B		UINT8	
3~5	NMEA String <sup>*1</sup>	474741	String of NMEA, exclude Talker Ex. GGA in binary format is 0x47,0x47,0x41	UINT8	
6	Interval	01	0 ~255, 0: disable	UINT8	second
7	Attributes	01	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 7 bytes					

\*1 NMEA string supports: GGA, GNS, GSA, GSV, GLL, RMC, VTG, ZDA, DTM, GBS, GRS, GST, THS, HDT.

**QUERY NMEA STRING INTERVAL – Query NMEA string interval of GNSS receiver (ID: 0x64, SID: 0x3C)**

This is a request message which is issued from the host to GNSS receiver to query nmea string interval. The GNSS receiver should respond with an ACK along with nmea message interval, “**NMEA STRING INTERVAL, ID: 0x64, SID: 0x9D**”, when succeeded and should respond with an NACK when failed. The payload length is 5 bytes.

Structure:

<0xA0,0xA1>< PL><64><3C><CS><0x0D,0x0A>

Example:

A0 A1 00 05 64 3C 47 47 41 19 0D 0A  
           1 2 3 4 5

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	3C		UINT8	
3~5	NMEA String <sup>*1</sup>	474741	String of NMEA, exclude Talker Ex. GGA in binary format is 0x47,0x47,0x41	UINT8	second
Payload Length : 5 bytes					

\*1 NMEA string supports: GGA, GNS, GSA, GSV, GLL, RMC, VTG, ZDA, DTM, GBS, GRS, GST, THS, HDT.



**SOFTWARE IMAGE DOWNLOAD USING INTERNAL LOADER – Download software image to system flash using Internal loader (ID: 0x64, SID: 0x4E)<sup>\*1</sup>**

This is a request message which is issued from the host to GNSS receiver to download image to system flash using internal loader when download from Flash to Flash. The GNSS receiver should respond with an ACK when succeeded and should respond with an NACK when failed. The payload length is 7 bytes.

Structure:

<0xA0,0xA1>< PL><64><4E>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 06 64 4E 07 00 00 00 00 2D 0D 0A  
           1  2  3  4  5  6  7

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	4E		UINT8	
3	Baud	07	0: 4800 1: 9600 2: 19200 3: 38400 4: 57600 5: 115200 6: 230400 7: 460800 8: 921600	UINT8	
4	Flash Type	00	0: default, auto 1: QSPI Winbond 2. QSPI EON 3: Parallel Flash NUMONYX 4. Parallel Flash EON	UINT8	
5-6	Flash ID	0000	If field 3 is not 0, then need to specify the flash ID	UINT16	
7	Buffer Used Index	00	0:8k 1:16K 2:24K 3:32K	UINT8	
Payload Length : 7 bytes					

\*1 Please refer to SkyTraq software image download application notes and API

**SOFTWARE IMAGE DOWNLOAD USING EXTERNAL LOADER – Download software image to system flash using external loader (ID: 0x64, SID: 0x4F)<sup>\*1</sup>**

This is a request message which is issued from the host to GNSS receiver to download image to system flash using external loader when download from Flash to Flash. The GNSS receiver should respond with an ACK when succeeded and should respond with an NACK when failed. The payload length is 7 bytes.

Structure:

<0xA0,0xA1>< PL><64><4F>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 06 64 4F 07 00 00 00 00 2C 0D 0A  
 1 2 3 4 5 6 7

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	4F		UINT8	
3	Baud	07	0: 4800 1: 9600 2: 19200 3: 38400 4: 57600 5: 115200 6: 230400 7: 460800 8: 921600	UINT8	
4	Flash Type	00	0: default, auto 1: QSPI Winbond 2: QSPI EON 3: Parallel Flash NUMONYX 4. Parallel Flash EON	UINT8	
5-6	Flash ID	0000	If field 3 is not 0, then need to specify the flash ID	UINT16	
7	Buffer Used Index	00	0:8k 1:16K 2:24K 3:32K	UINT8	
Payload Length : 7 bytes					

\*1 Please refer to SkyTraq software image download application notes and API

**GNSS BOOT STATUS – Boot status of GNSS receiver (ID: 0x64, SID: 0x80)**

This is a response message to “**QUERY GNSS BOOT STATUS, ID: 0x64, SID: 0x1**” which provides the boot status of GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 4 bytes.

Structure:

<0xA0,0xA1>< PL><64><80>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 04 64 80 00 01 E5 0D 0A  
          1  2  3  4

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	80		UINT8	
3	Status	00	0: Boot from flash OK 1: Boot from ROM due to flash boot failure	UINT8	
4	Flash Type	01	00: ROM Bit 1: Winbond-type QSPI Flash Bit 2: EON-type QSPI Flash Bit 3: Parallel Flash	UINT8	
Payload Length : 4 bytes					

**EXTENDED NMEA MESSAGE INTERVAL– Extended NMEA message interval of the GNSS receiver (ID: 0x64, SID: 0x81)**

This is a response message to “**QUERY EXTENDED NMEA MESSAGE INTERVAL, ID: 0x64, SID: 0x3**” which provides the extended NMEA message interval of the GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 14 bytes.

Structure:

<0xA0,0xA1>< PL><64><81>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 0E 64 81 01 01 03 01 01 01 01 00 00 00 00 00 E6 0D 0A  
           1  2  3  4  5  6  7  8  9  10 11 12 13 14

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	81		UINT8	
3	GGA Interval	01	0 ~255, 0: disable	UINT8	second
4	GSA Interval	01	0 ~255, 0: disable	UINT8	second
5	GSV Interval	03	0 ~255, 0: disable	UINT8	second
6	GLL Interval	01	0 ~255, 0: disable	UINT8	second
7	RMC Interval	01	0 ~255, 0: disable	UINT8	second
8	VTG Interval	01	0 ~255, 0: disable	UINT8	second
9	ZDA Interval	01	0 ~255, 0: disable	UINT8	second
10	GNS Interval	00	0 ~255, 0: disable	UINT8	second
11	GBS Interval	00	0 ~255, 0: disable	UINT8	second
12	GRS Interval	00	0 ~255, 0: disable	UINT8	second
13	DTM Interval	00	0 ~255, 0: disable	UINT8	second
14	GST Interval	00	0 ~255, 0: disable	UINT8	second

Payload Length : 14 bytes

**INTERFERENCE DETECTION STATUS – Interference detection status of GNSS receiver (ID: 0x64, SID: 0x83)**

This is a response message to “**QUERY INTERFERENCE DETECTION STATUS, ID: 0x64, SID: 0x7**” which provides the status of interference detection of the GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 4 bytes.

Structure:

<0xA0,0xA1>< PL><64><83>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 04 64 83 01 01 E7 0D 0A  
1 2 3 4

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	83		UINT8	
3	Interference Detection Control	01	Interference detection control status 0: disable 1: enable	UINT8	
4	Interference Status	01	0: unknown 1: no interference 2: lite 3: critical	UINT8	
Payload Length : 4 bytes					

**GPS PARAMETER SEARCH ENGINE NUMBER – Number of parameter search engine of GPS receiver (ID: 0x64, SID: 0x85)**

This is a response message to “**QUERY GPS PARAMETER SEARCH ENGINE NUMBER, ID: 0x64, SID: 0xB**” which provides the number of parameter search engine of the GPS receiver. This message is sent from the GPS receiver to host. The payload length is 3 bytes.

Structure:

<0xA0,0xA1>< PL><64><85>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 64 85 01 E0 0D 0A  
           1 2 3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	0A		UINT8	
3	Search engine number	01	0: PSE_MODE_DEFAULT ROM version decided by HW power-on latch, FLASH version : by SW define 1: PSE_MODE_LOW (2 PSE) 2: PSE_MODE_MID (4 PSE) 3: PSE_MODE_HIGH (6 PSE) 4: PSE_MODE_FULL (8 PSE)	UINT8	
Payload Length : 3 bytes					



**POSITION FIX NAVIGATION MASK – Position fix navigation Mask of GNSS receiver (ID: 0x64, SID: 0x88)**

This is a response message to “**QUERY POSITION FIX NAVIGATION MASK, ID: 0x64, SID: 0x12**”, which provides the position fix navigation mask of the GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 4 bytes.

Structure:

<0xA0,0xA1>< PL><64><88>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 04 64 88 00 00 EC 0D 0A

1 2 3 4 5

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	88		UINT8	
3	First fix navigation mask	00	0: 3D 1: 2D	UINT8	
4	Subsequent fix navigation mask	00	0: 3D 1: 2D	UINT8	
Payload Length : 4 bytes					

**GPS UTC REFERENCE TIME – UTC reference time of the GPS receiver (ID: 0x64, SID: 0x8A)**

This is a response message to “**QUERY GPS UTC REFERENCE TIME, ID: 0x64, SID: 0x16**” which provides the UTC reference time of the GPS receiver that synchronizes to GPS time. This message is sent from the GPS receiver to host. The payload length is 7 bytes.

Structure:

<0xA0,0xA1>< PL><64><8A>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 64 8A 01 07 DD 01 01 35 0D 0A  
           1 2 3 4 5 6 7

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	8A		UINT8	
3	Enable	01	0: enable 1: disable	UINT8	
4-5	UTC Year	07DD	UTC year	UINT16	
6	UTC Month	01	UTC month	UINT8	
7	UTC Day	01	UTC day	UINT8	
Payload Length : 7 bytes					

**GNSS NAVIGATION MODE – Navigation mode of the GNSS receiver (ID: 0x64, SID: 0x8B)**

This is a response message to “**QUERY GNSS NAVIGATION MODE, ID: 0x64, SID: 0x18**” which provides the navigation mode of the GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 3 bytes.

Structure:

<0xA0,0xA1>< PL><64><8B>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 64 8B 00 EF 0D 0A

1 2 3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	8B		UINT8	
3	Navigation mode	00	0: auto 1: prdestrian 2: car 3: marine 4: balloon 5: airborne	UINT8	
Payload Length : 3 bytes					

**GNSS CONSTELLATION TYPE FOR NAVIGATION SOLUTION – GNSS constellation type for navigation solution (ID: 0x64, SID: 0x8C)**

This is a response message to “**QUERY GNSS CONSTELLATION TYPE FOR NAVIGATION SOLUTION, ID 0x64, SID 0x1A**” which provides the GNSS constellation type of the GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 4 bytes.

Structure:

<0xA0,0xA1>< PL><64><8C>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 04 64 8C 00 09 E1 0D 0A

1 2 3 4

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	8C		UINT8	
3-4	Navigation type	00 09	Bit 0: GPS Bit 1: Glonass Bit 2: Galileo Bit 3: Beidou Bit 4: Navic	UINT16	
Payload Length : 4 bytes					

**GPS TIME – GPS time of GNSS receiver (ID: 0x64, SID: 0x8E)**

This is a response message to “**QUERY GPS TIME, ID: 0x64, SID: 0x20**”, which provides the GPS time of the GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 15 bytes.

Structure:

<0xA0,0xA1>< PL><64><8E>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 0F 64 8E 1B 27 5A DD 00 0B B2 3D 06 F7 10 10 03 27 0D 0A  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	8E		UINT8	
3-6	Time of week	1B275ADD	Time of week in unit of millisecond	UINT32	ms
7-10	Sub time of week	000BB23D	Millisecond fraction of tow in unit of nanosecond	UINT32	ns
11-12	Week number	06F7	Week number	UINT16	
13	Default leap seconds	10	Default GPS/UTC leap seconds	SINT08	second
14	Current leap seconds	10	Current GPS/UTC leap seconds	SINT08	second
15	Valid	03	BIT0: GPS time of week, 1: valid; 0: invalid BIT1: GPS week number, 1: valid; 0: invalid BIT2: GPS leap seconds from subfram4 page 18, 1: valid; 0: invalid	UINT08	
Payload Length : 15 bytes					

**PSTI MESSAGE INTERVAL – PSTI message interval of GNSS receiver (ID: 0x64, SID: 0x8F)**

This is a response message to “**QUERY PSTI MESSAGE INTERVAL, ID 0x64, SID 0x22**”, which provides the PSTI message interval of the GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 3 bytes.

Structure:

<0xA0,0xA1>< PL><64><8F>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 64 8F 01 EA 0D 0A

1 2 3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	8F		UINT8	
3	Message Interval	01	PSTI message interval 0: disable 1~255: interval or enable	UINT8	
Payload Length : 3 bytes					

**GNSS DATUM INDEX – Datum index of GNSS receiver (ID: 0x64, SID: 0x92)**

This is a response message to “**QUERY GNSS DATUM INDEX, ID: 0x64, SID: 0x28**”, which provides the datum index of the GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 4 bytes.

Structure:

<0xA0,0xA1>< PL><64><92>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 04 64 92 00 00 06 0D 0A

1 2 3 4 5

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	92		UINT8	
3-4	Datum index	0000	Datum index, range 0-220. Please refer to Appendix B	UINT16	
Payload Length : 4 bytes					

**GNSS GEO-FENCING DATA BY POLYGON – Geo-fencing data by polygon of GNSS receiver (ID: 0x64, SID: 0x99)**

This is a response message to “**QUERY GNSS GEO-FENCING DATA BY POLYGON, ID: 0x64, SID: 0x35**”, which provides the geo-fencing data by polygon of GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is maximum 260 bytes..

Structure:

<0xA0,0xA1>< PL><64><99>< message body><CS><0x0D,0x0A>

Example:

```
A0 A1 00 44 64 99 01 04 40 38 C8 E5 BF 18 FC 73 40 5E 40 90 38 79 65 94 40 38 C8 E9 C1 87 15 D6
    1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28

40 5E 40 92 D5 3D 3C 54 40 38 C8 F1 8D 47 37 07 40 5E 40 92 24 BC 08 40 40 38 C8 ED 64 06 8F BC
29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60

40 5E 40 8F 70 E0 2B BE 14 0D 0A
61 62 63 64 65 66 67 68
```

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	99		UINT8	
3	Polygon	01	Polygon index, range: 1~4	UINT8	
4	Number of points	04	Number of points of a polygon Maximum number: 16	UINT8	
5-12	Latitude	4038C8E5 BF18FC73	Latitude in double of polygon points #1	DPFP	degree
13-20	Longitude	405E4090 38796594	Longitude in double of polygon points #1	DPFP	degree
21-28	Latitude	4038C8E9 C18715D6	Latitude in double of polygon points #2	DPFP	degree
29-36	Longitude	405E4092 D53D3C54	Longitude in double of polygon points #2	DPFP	degree
37-44	Latitude	4038C8F1 8D473707	Latitude in double of polygon points #3	DPFP	degree
45-52	Longitude	405E4092 24BC0840	Longitude in double of polygon points #3	DPFP	degree
53-60	Latitude	4038C8ED	Latitude in double of polygon points	DPFP	degree



		64068FBC	#4		
61-68	Longitude	405E408F 70E02BBE	Longitude in double of polygon points #4	DPFP	degree
.....					
5+((ndx-1)*16) ~ 12+((ndx-1)*16)	Latitude		Latitude in double of polygon points #ndx	DPFP	degree
13+((ndx-1)*16) ~ 20+((ndx-1)*16)	Longitude		Longitude in double of polygon points #ndx	DPFP	degree
Payload Length : maximum 260 bytes, ndx = number of polygon points, maximum 16 points of each polygon					

**GNSS MULTI-POLYGON GEO-FENCING RESULT – Multi-Polygon geo-fencing result of GNSS receiver (ID: 0x64, SID: 0x9A) \*1**

This is a response message to “**QUERY GNSS MULTI-POLYGON GEO-FENCING RESULT, ID: 0x64, SID: 0x36**”, which provides the geo-fencing result of GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 22 bytes..

Structure:

<0xA0,0xA1>< PL><64><9A>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 16 64 9A 00 00 00 00 40 38 C8 FD C1 61 5E C0 40 5E 40 AB C5 15 48 67 87 0D 0A  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Sub ID	9A		UINT8	
3	Result	00	0: current GNSS position fix is out of configured polygon #1 1: current GNSS position fix within configured polygon #1	UINT8	
4	Result	00	0: current GNSS position fix is out of configured polygon #2 1: current GNSS position fix within configured polygon #2	UINT8	
5	Result	00	0: current GNSS position fix is out of configured polygon #3 1: current GNSS position fix within configured polygon #3	UINT8	
6	Result	00	0: current GNSS position fix is out of configured polygon #4 1: current GNSS position fix within configured polygon #4	UINT8	
7-14	Latitude	4038C8FD C1615EC0	Latitude in double of current GNSS position fix	DPFP	degree
15-22	Longitude	405E40AB C5154867	Longitude in double of current GNSS position fix	DPFP	degree
Payload Length : 22 bytes					

**NMEA STRING INTERVAL– NMEA string interval of the GNSS receiver (ID: 0x64, SID: 0x9D)**

This is a response message to “**QUERY NMEA STRING INTERVAL, ID: 0x64, SID: 0x3C**” which provides the NMEA string interval of the GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 3 bytes.

Structure:

<0xA0,0xA1>< PL><64><9D>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 64 9D 01 F8 0D 0A

1 2 3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	9D		UINT8	
3	String Interval	01	0 ~255, 0: disable	UINT8	second
Payload Length : 3 bytes					

**VERSION EXTENSION STRING – Version extension string of GNSS receiver (ID: 0x64, SID: 0xFE)**

This is a response message to “**QUERY VERSION EXTENSION STRING, ID: 0x64, SID: 0x7D**” which provides the version extension string of the GNSS receiver. This message is sent from the GPS receiver to host. The payload length is 34 bytes.

Structure:

<0xA0,0xA1>< PL><64><FE>< message body><CS><0x0D,0x0A>

Example:

```
A0 A1 00 22 64 FE 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
    1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29

00 00 00 00 00 9A 0D 0A
30 31 32 33 34
```

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	64		UINT8	
2	Message Sub-ID	FE		UINT8	
3~34	Version extension string	00~00	Version extension string, 00 when end of string. If the firmware is an official release, the version string is all 00. If the firmware is under developed, the version string is “-dev-”. If the firmware is a release candidate, the version string is “-rc-”.	UINT8	
Payload Length : 34 bytes					

**CONFIGURE 1PPS PULSE WIDTH – Configure 1PPS pulse width of GNSS receiver (ID: 0x65, SID: 0x1)**

This is a request message which will set the pulse width of 1PPS timing to the GNSS receiver. This command is issued from the host to GNSS receiver and GNSS receiver should respond with an ACK or NACK. If value of pulse width is not valid, the GNSS receiver will respond with an NACK. The payload length is 7 bytes.

Structure:

<0xA0,0xA1>< PL><65><01>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 07 65 01 00 00 00 01 00 65 0D 0A  
           1 2 3 4 5 6 7

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	65		UINT8	-
2	Message Sub-ID	01		UINT8	
3-6	Pulse Width	00 00 00 01	Pulse width of 1PPS timing Valid value between 1~100000	UINT32	us
7	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 7 bytes					

**QUERY 1PPS PULSE WIDTH – Query 1PPS pulse width of GNSS receiver (ID: 0x65, SID: 0x2)**

This is a request message which is issued from the host to GNSS receiver to query 1PPS pulse width. The GNSS receiver should respond with an ACK along with information of 1PPS pulse width, **“1PPS PULSE WIDTH, ID: 0x65, SID: 0x80”**, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><65><02>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 65 02 67 0D 0A

1 2 3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	65		UINT8	
2	Message Sub-ID	02		UINT8	
Payload Length : 2 bytes					

**CONFIGURE 1PPS FREQUENCY OUTPUT – Configure frequency output of 1PPS (ID: 0x65, SID: 0x3)**

This is a request message which will set the frequency output of 1PPS to the GNSS receiver. This command is issued from the host to GNSS receiver and GNSS receiver should respond with an ACK or NACK. If value of frequency is not valid, the GNSS receiver will respond with an NACK. The payload length is 7 bytes.

Structure:

<0xA0,0xA1>< PL><65><03>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 07 65 03 00 00 00 01 01 66 0D 0A  
           1 2 3 4 5 6 7

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	65		UINT8	-
2	Sub ID	03		UINT8	
3-6	Frequency output	00000001	Frequency output of 1PPS Valid value between 0~10000000	UINT32	Hz
7	Attributes	01	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 7 bytes					

**QUERY 1PPS FREQUENCY OUTPUT – Query 1PPS frequency output of the GNSS receiver (ID: 0x65, SID: 0x4)**

This is a request message which is issued from the host to GNSS receiver to query 1PPS frequency. The GPS receiver should respond with an ACK along with information of 1PPS FREQUENCY, “**1PPS FREQUENCY OUTPUT ID 0x65, SID 0x81**”, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><65><04>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 65 04 61 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	65		UINT8	
2	Sub ID	04		UINT8	
Payload Length : 2 bytes					



**1PPS PULSE WIDTH – 1PPS pulse width of GNSS receiver (ID: 0x65, SID: 0x80)**

This is a response message to “**QUERY 1PPS PULSE WIDTH, ID: 0x65, SID: 0x2**” which provides the 1PPS pulse width of the GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 6 bytes.

Structure:

<0xA0,0xA1>< PL><65><80>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 06 65 80 00 00 00 01 E4 0D 0A  
1 2 3 4 5 6

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	65		UINT8	-
2	Message Sub-ID	80		UINT8	
3-6	Pulse Width	00 00 00 01	Pulse Width of 1PPS timing mode	UINT32	us
Payload Length : 6 bytes					

**1PPS FREQUENCY OUTPUT – 1PPS frequency of the GNSS receiver (ID: 0x65, SID: 0x81)**

This is a response message to “**QUERY 1PPS FREQUENCY OUTPUT, ID: 0x65, SID: 0x4**”, which provides the 1PPS frequency of the GPS receiver. This message is sent from the GNSS receiver to host. The payload length is 6 bytes.

Structure:

<0xA0,0xA1>< PL><65><81>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 06 65 81 00 00 00 01 E5 0D 0A  
1 2 3 4 5 6

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	65		UINT8	-
2	Sub ID	81		UINT8	
3-6	Frequency	00000001	Frequency of 1PPS	UINT32	Hz
Payload Length : 6 bytes					

**SET BEIDOU EPHEMERIS – Set Beidou ephemeris to GNSS receiver (ID: 0x67, SID: 0x01)**

This is a request message which is issued from the host to GNSS receiver to set Beidou ephemeris data (open an ephemeris file) to GNSS receiver. The GNSS receiver should respond with an ACK when succeeded and should respond with a NACK when failed. There are 2 types of ephemeris corresponding to 2 types of Beidou satellites, GEO satellite and MEO/IGSO satellite. The GEO payload length is 126 bytes and the MEO/IGSO payload length is 87 bytes.

Structure:

<0xA0,0xA1>< PL><67><01>< message body><CS><0x0D,0x0A>

Example for GEO type of satellites:

```

a0 a1 00 7e 67 01 00 04 00 01 00 00 00 01 07 2c c1 60 f4 00 00 00 00 00 00 00 00 00 00 00 00
  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28

00 00 00 00 00 00 00 00 00 00 00 00 1c b1 40 00 00 00 1c 3c 50 00 04 37 f8 0a 08 00 00 00 58 80 4e d4
29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60

4d 22 34 60 04 00 00 00 5c b0 ec c8 ba d8 c0 00 00 00 00 00 b0 ff f5 e4 78 2c 04 e9 28 00 00 00
61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92

24 ff 07 a8 04 7f fc ff e9 00 00 00 e4 e3 ce 8c c5 2c 24 4a 1c 00 00 00 08 30 c8 00 00 00 00 00
93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124

00 00 5b 0d 0a
125126
    
```

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	67		UINT8	
2	Sub ID	01		UINT8	
3-4	SV id	0004	Satellite id	UINT16	
5	Type	00	0: GEO satellite 1: MEO/IGSO satellite		
6	valid	01	0: not valid 1: valid	UINT8	
7	SubFrameData[0][0]		Eph data subframe 1	UINT8	
8	SubFrameData[0][1]		Eph data subframe 1	UINT8	
9	SubFrameData[0][2]		Eph data subframe 1	UINT8	
10	SubFrameData[0][3]		Eph data subframe 1	UINT8	

11	SubFrameData[0][4]		Eph data subframe 1	UINT8	
12	SubFrameData[0][5]		Eph data subframe 1	UINT8	
13	SubFrameData[0][6]		Eph data subframe 1	UINT8	
14	SubFrameData[0][7]		Eph data subframe 1	UINT8	
15	SubFrameData[0][8]		Eph data subframe 1	UINT8	
16	SubFrameData[0][9]		Eph data subframe 1	UINT8	
17	SubFrameData[0][10]		Eph data subframe 1	UINT8	
18	SubFrameData[0][11]		Eph data subframe 1	UINT8	
19~30	SubFrameData[1][0~11]		Eph data subframe 2, same as field 7-18 for GEO satellite	UINT8	
31-42	SubFrameData[2][0~11]		Eph data subframe 2, same as field 7-18 for GEO satellite	UINT8	
43-54	SubFrameData[3][0~11]		Eph data subframe 3, same as field 7-18 for GEO satellite	UINT8	
55-66	SubFrameData[4][0~11]		Eph data subframe 4, same as field 7-18 for GEO satellite	UINT8	
67-78	SubFrameData[5][0~11]		Eph data subframe 5, same as field 7-18 for GEO satellite	UINT8	
79-90	SubFrameData[6][0~11]		Eph data subframe 6, same as field 7-18 for GEO satellite	UINT8	
91-102	SubFrameData[7][0~11]		Eph data subframe 7, same as field 7-18 for GEO satellite	UINT8	
103-114	SubFrameData[8][0~11]		Eph data subframe 8, same as field 7-18 for GEO satellite	UINT8	
115-126	SubFrameData[9][0~11]		Eph data subframe 9, same as field 7-18 for GEO satellite	UINT8	
Payload Length : 126 bytes for GEO type of satellites					

Example of MEI/IGSO type of satellites:

```

a0 a1 00 57 67 01 00 06 01 01 00 00 00 10 72 f0 16 18 c0 00 00 00 00 00 00 00 01 ff d8 63
  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28

ff fc b9 fc 84 00 01 44 ff f3 70 81 b8 20 b2 30 20 7c 75 c4 0b 6a 80 ff ff f0 fe b2 b8 a9 e9 54
29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60

00 07 80 b1 34 6c ff ff fc ff ff fc ff ff f8 d0 98 74 8c 16 52 cc ad 98 c8 55 0d 0a
61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87

```

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	67		UINT8	
2	Sub ID	01		UINT8	
3-4	SV id	0006	Satellite id	UINT16	
5	Type	01	0: GEO satellite 1: MEO/IGSO satellite		
6	valid	01	0: not valid 1: valid	UINT8	
7	SubFrameData[0][0]		Eph data subframe 1	UINT8	
8	SubFrameData[0][1]		Eph data subframe 1	UINT8	
9	SubFrameData[0][2]		Eph data subframe 1	UINT8	
10	SubFrameData[0][3]		Eph data subframe 1	UINT8	
11	SubFrameData[0][4]		Eph data subframe 1	UINT8	
12	SubFrameData[0][5]		Eph data subframe 1	UINT8	
13	SubFrameData[0][6]		Eph data subframe 1	UINT8	
14	SubFrameData[0][7]		Eph data subframe 1	UINT8	
15	SubFrameData[0][8]		Eph data subframe 1	UINT8	
16	SubFrameData[0][9]		Eph data subframe 1	UINT8	
17	SubFrameData[0][10]		Eph data subframe 1	UINT8	
18	SubFrameData[0][11]		Eph data subframe 1	UINT8	
19	SubFrameData[0][12]		Eph data subframe 1	UINT8	
20	SubFrameData[0][13]		Eph data subframe 1	UINT8	
21	SubFrameData[0][14]		Eph data subframe 1	UINT8	
22	SubFrameData[0][15]		Eph data subframe 1	UINT8	
23	SubFrameData[0][16]		Eph data subframe 1	UINT8	
24	SubFrameData[0][17]		Eph data subframe 1	UINT8	
25	SubFrameData[0][18]		Eph data subframe 1	UINT8	
26	SubFrameData[0][19]		Eph data subframe 1	UINT8	
27	SubFrameData[0][20]		Eph data subframe 1	UINT8	
28	SubFrameData[0][21]		Eph data subframe 1	UINT8	
29	SubFrameData[0][22]		Eph data subframe 1	UINT8	
30	SubFrameData[0][23]		Eph data subframe 1	UINT8	
31	SubFrameData[0][24]		Eph data subframe 1	UINT8	
32	SubFrameData[0][25]		Eph data subframe 1	UINT8	
33	SubFrameData[0][26]		Eph data subframe 1	UINT8	
34~60	SubFrameData[1][0~26]		Eph data subframe 2, same as field 7-33 for MEO/IGSO satellite	UINT8	
61-87	SubFrameData[2][0~26]		Eph data subframe 3, same as field 7-33 for MEO/IGSO satellite	UINT8	

Payload Length : 87 bytes for MEO/IGSO type of satellites

**GET BEIDOU EPHEMERIS – Get Beidou ephemeris data used of GNSS receiver (ID: 0x67, SID: 0x02)**

This is a request message which is issued from the host to GNSS receiver to retrieve ephemeris data. The GNSS receiver should respond with an ACK along with information of ephemeris, “**BEIDOU EPHEMERIS DATA, ID 0x67, SID 0x80**”, when succeeded and should respond with an NACK when failed. The payload length is 3 bytes.

Structure:

<0xA0,0xA1>< PL><67><02>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 67 02 00 65 0D 0A

1 2 3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	67		UINT8	
2	Sub ID	02		UINT8	
3	SV #	00	0: means all SVs 1~32 : mean for the particular SV	UINT8	
Payload Length : 3 bytes					

**BEIDOU EPHEMERIS DATA – Beidou ephemeris data of the GNSS receiver (ID: 0x67, SID: 0x80)**

This is a response message to “GET BEIDOU EPHEMERIS, ID 0x67, SID 0x02”, which provides the Beidou ephemeris data of the GNSS receiver to Host. The Host will save the ephemeris data as an ephemeris file. This message is sent from the GNSS receiver to host. There are 2 types of ephemeris corresponding to 2 types of Beidou satellites, GEO satellite and MEO/IGSO satellite. The GEO payload length is 126 bytes and the MEO/IGSO payload length is 87 bytes.

Structure:

<0xA0,0xA1>< PL><67><80>< message body><CS><0x0D,0x0A>

Example of GEO type of satellites:

```

A0 A1 00 7E 67 80 00 01 00 01 00 00 00 01 07 2C C1 62 38 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28

00 00 00 00 00 00 00 00 3F F5 DC 7A 60 00 00 00 24 F9 90 00 04 1B E4 FE 80 00 00 00 58 50 21 B4
29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60

4D 20 EC 00 00 00 00 00 94 B0 9E C8 BA FE 70 FF FC 00 00 00 90 FF EE 34 78 2C 04 AE 54 00 00 00
61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92

5C FF 12 BC FF 32 40 00 19 00 00 00 EC D6 B2 9C 48 2E 50 77 F0 00 00 00 B8 2D C8 00 00 00 00 00
93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124

00 00 B5 0D 0A
125126
    
```

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	67		UINT8	
2	Sub ID	80		UINT8	
3-4	SV id	0001	Satellite id	UINT16	
5	Type	00	0: GEO satellite 1: MEO/IGSO satellite	UINT8	
6	valid	01	0: not valid 1: valid	UINT8	
7	SubFrameData[0][0]		Eph data subframe 1	UINT8	
8	SubFrameData[0][1]		Eph data subframe 1	UINT8	
9	SubFrameData[0][2]		Eph data subframe 1	UINT8	
10	SubFrameData[0][3]		Eph data subframe 1	UINT8	
11	SubFrameData[0][4]		Eph data subframe 1	UINT8	



12	SubFrameData[0][5]		Eph data subframe 1	UINT8	
13	SubFrameData[0][6]		Eph data subframe 1	UINT8	
14	SubFrameData[0][7]		Eph data subframe 1	UINT8	
15	SubFrameData[0][8]		Eph data subframe 1	UINT8	
16	SubFrameData[0][9]		Eph data subframe 1	UINT8	
17	SubFrameData[0][10]		Eph data subframe 1	UINT8	
18	SubFrameData[0][11]		Eph data subframe 1	UINT8	
19~30	SubFrameData[1][0~11]		Eph data subframe 2, same as field 7-18 for GEO satellite	UINT8	
31-42	SubFrameData[2][0~11]		Eph data subframe 2, same as field 7-18 for GEO satellite	UINT8	
43-54	SubFrameData[3][0~11]		Eph data subframe 3, same as field 67-18 for GEO satellite	UINT8	
55-66	SubFrameData[4][0~11]		Eph data subframe 4, same as field 7-18 for GEO satellite	UINT8	
67-78	SubFrameData[5][0~11]		Eph data subframe 5, same as field 7-18 for GEO satellite		
79-90	SubFrameData[6][0~11]		Eph data subframe 6, same as field 7-18 for GEO satellite		
91-102	SubFrameData[7][0~11]		Eph data subframe 7, same as field 7-18 for GEO satellite		
103-114	SubFrameData[8][0~11]		Eph data subframe 8, same as field 7-18 for GEO satellite		
115-126	SubFrameData[9][0~11]		Eph data subframe 9, same as field 7-18 for GEO satellite		
Payload Length : 126 bytes for GEO type of satellites					

Example for MEI/IGSO type of satellites:

```

A0 A1 00 57 67 80 00 06 01 01 00 00 00 10 72 F0 16 18 C0 00 00 00 00 00 00 00 01 FF D8 63
  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28

FF FC B9 FC 84 00 01 44 FF F3 70 81 B8 20 B2 30 20 7C 75 C4 0B 6A 80 FF FF F0 FE B2 B8 A9 E9 54
 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60

00 07 80 B1 34 6C FF FF FC FF FF FC FF FF FC FF F8 D0 98 74 8C 16 52 CC AD 98 C8 D4 0D 0A
 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87

```

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	67		UINT8	

2	Sub ID	80		UINT8	
3-4	SV id	0006	Satellite id	UINT16	
5	Type	01	0: GEO satellite 1: MEO/IGSO satellite	UINT8	
6	valid	01	0: not valid 1: valid	UINT8	
7	SubFrameData[0][0]		Eph data subframe 1	UINT8	
8	SubFrameData[0][1]		Eph data subframe 1	UINT8	
9	SubFrameData[0][2]		Eph data subframe 1	UINT8	
10	SubFrameData[0][3]		Eph data subframe 1	UINT8	
11	SubFrameData[0][4]		Eph data subframe 1	UINT8	
12	SubFrameData[0][5]		Eph data subframe 1	UINT8	
13	SubFrameData[0][6]		Eph data subframe 1	UINT8	
14	SubFrameData[0][7]		Eph data subframe 1	UINT8	
15	SubFrameData[0][8]		Eph data subframe 1	UINT8	
16	SubFrameData[0][9]		Eph data subframe 1	UINT8	
17	SubFrameData[0][10]		Eph data subframe 1	UINT8	
18	SubFrameData[0][11]		Eph data subframe 1	UINT8	
19	SubFrameData[0][12]		Eph data subframe 1	UINT8	
20	SubFrameData[0][13]		Eph data subframe 1	UINT8	
21	SubFrameData[0][14]		Eph data subframe 1	UINT8	
22	SubFrameData[0][15]		Eph data subframe 1	UINT8	
23	SubFrameData[0][16]		Eph data subframe 1	UINT8	
24	SubFrameData[0][17]		Eph data subframe 1	UINT8	
25	SubFrameData[0][18]		Eph data subframe 1	UINT8	
26	SubFrameData[0][19]		Eph data subframe 1	UINT8	
27	SubFrameData[0][20]		Eph data subframe 1	UINT8	
28	SubFrameData[0][21]		Eph data subframe 1	UINT8	
29	SubFrameData[0][22]		Eph data subframe 1	UINT8	
30	SubFrameData[0][23]		Eph data subframe 1	UINT8	
31	SubFrameData[0][24]		Eph data subframe 1	UINT8	
32	SubFrameData[0][25]		Eph data subframe 1	UINT8	
33	SubFrameData[0][26]		Eph data subframe 1	UINT8	
34~60	SubFrameData[1][0~26]		Eph data subframe 2, same as field 7-33 for MEO/IGSO satellite	UINT8	
61-87	SubFrameData[2][0~26]		Eph data subframe 3, same as field 7-33 for MEO/IGSO satellite	UINT8	
Payload Length : 87 bytes for MEO/IGSO type of satellites					

**CONFIGURE RTK MODE AND OPERATIONAL FUNCTION – Configure Real Time Kinematic mode and operational function of GNSS receiver (ID: 0x6A, SID: 0x6) <sup>\*1</sup>**

This is a request message which will set Real Time Kinematic mode and operational function to the GNSS receiver. This command is issued from the host to GNSS receiver and GNSS receiver should respond with an ACK or NACK. The payload length is 37 bytes.

Structure:

<0xA0,0xA1>< PL><6A><06>< message body><CS><0x0D,0x0A>

Example:

```
A0 A1 00 25 6A 06 00 00 00 00 07 D0 00 00 00 1E 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
    1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29
00 00 00 00 00 000000 A5 0D 0A
30 31 32 33 34 353637
```

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	6A		UINT8	-
2	Message Sub-ID	06		UINT8	
3	RTK Mode	00	0: RTK rover mode 1: RTK base mode <sup>2</sup> 2: RTK precisely kinematic base mode	UINT8	
4	RTK Operational Function	00	If field 3 RTK Mode is RTK rover mode 0: Normal 1: Float 2: Moving base If field 3 RTK Mode is RTK base mode 0: Kinematic 1: Survey 2: Static If field 3 RTK Mode is RTK precisely kinematic base mode 0: Normal 1: Float	UINT8	
5-8	Survey Length	000007D0	Used when RTK base mode with survey operational function. Survey length when in Timing Survey Mode not used when in other mode. Valid values between 60~1209600	UINT32	second

9-12	Standard Deviation	0000001E	Used when RTK base mode with survey operational function. Standard Deviation when in Timing Survey Mode not used when in other mode. Valid values between 3~100	UINT32	meter
13-20	Latitude	0000000000000000	Used when RTK base mode with static operational function Latitude in double in Timing Static Mode not used when in other mode.	DPFP	degree
21-28-	Longitude	0000000000000000	Used when RTK base mode with static operational function Longitude in double in Timing Static Mode not used when in other mode.	DPFP	degree
29-32	Altitude	00000000	Used when RTK base mode with static operational function Altitude in float in Timing Static Mode not used when in other mode.	SPFP	meter
33-36	Baseline length constraint	00000000	Used for moving base mode when the baseline length is fixed and known to centimeter-level accuracy Input 0 if baseline length is unknown or floating	SPFP	meter
37	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 37 bytes					

\*1 supported only in RTK mode receivers

\*2 Please refer to AN0030 for raw measurement data output format when in RTK base mode.

**QUERY RTK MODE AND OPERATIONAL FUNCTION – Query Real Time Kinematic mode and operational function of GNSS receiver (ID: 0x6A, SID: 0x7) <sup>\*1</sup>**

This is a request message which is issued from the host to GNSS receiver to query Real Time Kinematic mode and its operational function. The GNSS receiver should respond with an ACK along with mode of RTK, “**RTK MODE AND OPERATION FUNCTION, ID: 0x6A, SID: 0x83**”, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><6A><07>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 6A 07 6D 0D 0A  
          1  2  3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	6A		UINT8	
2	Message Sub-ID	07		UINT8	
Payload Length : 2 bytes					

\*1 supported only in RTK mode receivers

**CONFIGURE RTK SLAVE BASE SERIAL PORT BAUD RATE – Configure RTK Slave Base Serial Port Baud rate of GNSS receiver (ID: 0x6A, SID: 0xC) \*1**

This is a request message which will set RTK slave base serial port baud rate to the GNSS receiver. This command is issued from the host to GNSS receiver and GNSS receiver should respond with an ACK or NACK. The payload length is 4 bytes.

Structure:

<0xA0,0xA1>< PL><6A><0C>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 04 6A 0C 05 01 62 0D 0A  
                   1 2 3 4

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	6A		UINT8	-
2	Message Sub-ID	0C		UINT8	
3	Baud Rate	05	0: 4800 1: 9600 2: 19200 3: 38400 4: 57600 5: 115200 6: 230400 7: 460800 8: 921600	UINT8	
4	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 4 bytes					

\*1 supported only in RTK mode receivers

**QUERY RTK SLAVE BASE SERIAL PORT BAUD RATE – Query RTK Base Serial Port Baud Rate of GNSS receiver (ID: 0x6A, SID: 0xD) <sup>\*1</sup>**

This is a request message which is issued from the host to GNSS receiver to query RTK slave base serial port baud rate. The GNSS receiver should respond with an ACK along with RTK slave base serial port baud rate, “**RTK SLAVE BASE SERIAL PORT BAUD RATE, ID: 0x6A, SID: 0x85**”, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><6A><0D>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 6A 0D 67 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	6A		UINT8	
2	Message Sub-ID	0D		UINT8	
Payload Length : 2 bytes					

\*1 supported only in RTK mode receivers

**CONFIGURE RTK PRECISELY KINEMATIC BASE SERIAL PORT BAUD RATE – Configure RTK Precisely Kinematic Base Serial Port Baud rate of GNSS receiver (ID: 0x6A, SID: 0x13) <sup>\*1</sup>**

This is a request message which will set RTK precisely kinematic base serial port baud rate to the GNSS receiver. This command is issued from the host to GNSS receiver and GNSS receiver should respond with an ACK or NACK. The payload length is 4 bytes.

Structure:

<0xA0,0xA1>< PL><6A><13>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 04 6A 13 06 01 7E 0D 0A  
           1 2 3 4

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	6A		UINT8	-
2	Message Sub-ID	13		UINT8	
3	Baud Rate	06	0: 4800 1: 9600 2: 19200 3: 38400 4: 57600 5: 115200 6: 230400 7: 460800 8: 921600	UINT8	
4	Attributes	00	0: update to SRAM 1: update to both SRAM & FLASH	UINT8	
Payload Length : 4 bytes					

\*1 supported only in RTK mode receivers



**QUERY RTK PRECISELY KINEMATIC BASE SERIAL PORT BAUD RATE – Query RTK Precisely Kinematic Base Serial Port Baud Rate of GNSS receiver (ID: 0x6A, SID: 0x14) <sup>\*1</sup>**

This is a request message which is issued from the host to GNSS receiver to query RTK precisely kinematic base serial port baud rate. The GNSS receiver should respond with an ACK along with RTK precisely kinematic base serial port baud rate, **“RTK PRECISELY KINEMATIC BASE SERIAL PORT BAUD RATE, ID: 0x6A, SID: 0x88”**, when succeeded and should respond with an NACK when failed. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><6A><14>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 6A 14 FD 0D 0A  
                   1  2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	6A		UINT8	
2	Message Sub-ID	14		UINT8	
Payload Length : 2 bytes					

\*1 supported only in RTK mode receivers

**RTK MODE AND OPERATIONAL FUNCTION – Real Time Kinematic mode and operational function of the GNSS receiver (ID: 0x6A, SID: 0x83)<sup>\*1</sup>**

This is a response message to “**QUERY RTK MODE AND OPERATIONAL FUNCTION, ID: 0x6A, SID: 0x7**”, which provides all information of the Real Time Kinematic operational mode of the GPS receiver. This message is sent from the GNSS receiver to host. The payload length is 41 bytes.

Structure:

<0xA0,0xA1>< PL><6A><83>< message body><CS><0x0D,0x0A>

Example:

```
A0 A1 00 29 6A 83 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
    1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
30 31 32 33 34 35 36 37 38 39 40 41
```

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	6A		UINT8	-
2	Message Sub-ID	83		UINT8	
3	RTK Mode	00	0: RTK rover mode 1: RTK base mode <sup>2</sup> 2: RTK precisely kinematic base mode	UINT8	
4	RTK Operational Function	00	When field 3 RTK Mode is RTK rover mode 0: Normal 1: Float 2: Moving base When field 3 RTK Mode is RTK base mode 0: Kinematic 1: Survey 2: Static When field 3 RTK Mode is RTK precisely kinematic base mode 0: Normal 1: Float Value saved in SRAM/Flash by request command	UINT8	
5-8	Saved Survey Length	00000000	Used when in RTK base mode Survey length used when in “Saved	UINT32	second

			Timing Survey Mode”.		
9-12	Standard deviation	00000000	Used when in RTK base mode Standard Deviation when in Timing Survey Mode not used when in other mode. Valid values between 3~100	UINT32	meter
13-20	Saved Latitude	0000000000000000	Used when in RTK base mode Latitude in double in Timing Static Mode	DPFP	degree
21-28	Saved Longitude	0000000000000000	Used when in RTK base mode Longitude in double in Timing Static Mode	DPFP	degree
29-32	Saved Altitude	00000000	Used when in RTK base mode Altitude in float in Timing Static Mode	SPFP	meter
33	Run-time Timing Mode	00	Used when in RTK base mode 00 = Timing Normal Mode 01 = Timing Survey Mode 02 = Timing Static Mode Value currently used and not saved in SRAM/Flash	UINT8	
34-37	Run-time Survey Length	00000000	Used when in RTK base mode Survey length used when in “Run-time Timing Survey Mode”. Value currently used and not saved in SRAM/Flash	UINT32	second
38-41	Baseline length constraint	00000000	Used for moving base mode when the baseline length is fixed and known to centimeter-level accuracy	SPFP	meter
Payload Length : 41 bytes					

\*1 supported only in RTK mode receivers

\*2 Please refer to AN0030 for raw measurement data output format when in RTK base mode.

**RTK SLAVE BASE SERIAL PORT BAUD RATE – RTK Slave Base Serial Port Baud Rate of the GNSS receiver (ID: 0x6A, SID: 0x85) <sup>\*1</sup>**

This is a response message to “**QUERY RTK SLAVE BASE SERIAL PORT BAUD RATE, ID: 0x6A, SID: 0xD**”, which provides the RTK slave base serial port baud rate of the RTK GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 3 bytes.

Structure:

<0xA0,0xA1>< PL><6A><85>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 6A 85 05 EA 0D 0A  
                   1 2 3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	6A		UINT8	-
2	Sub ID	85		UINT8	
3	Baud Rate	00	0: 4800 1: 9600 2: 19200 3: 38400 4: 57600 5: 115200 6: 230400 7: 460800 8: 921600	UINT8	
Payload Length : 3 bytes					

\*1 supported only in RTK mode receivers

**RTK PRECISELY KINEMATIC BASE SERIAL PORT BAUD RATE – RTK Precisely Kinematic Base Serial Port Baud Rate of the GNSS receiver (ID: 0x6A, SID: 0x88) \*1**

This is a response message to “**QUERY RTK PRECISELY KINEMATIC BASE SERIAL PORT BAUD RATE, ID: 0x6A, SID: 0x14**”, which provides the RTK precisely kinematic base serial port baud rate of the RTK GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 3 bytes.

Structure:

<0xA0,0xA1>< PL><6A><88>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 6A 88 06 E4 0D 0A  
                   1 2 3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	6A		UINT8	-
2	Sub ID	88		UINT8	
3	Baud Rate	06	0: 4800 1: 9600 2: 19200 3: 38400 4: 57600 5: 115200 6: 230400 7: 460800 8: 921600	UINT8	
Payload Length : 3 bytes					

\*1 supported only in RTK mode receivers

**SET IRNSS EPHEMERIS – Set IRNSS ephemeris to GNSS receiver (ID: 0x6F, SID: 0x03)**

This is a request message which is issued from the host to GNSS receiver to set IRNSS ephemeris data (open an ephemeris file) to GNSS receiver. The GNSS receiver should respond with an ACK when succeeded and should respond with a NACK when failed. The payload length is 77 bytes.

Structure:

<0xA0,0xA1>< PL><6F><03>< message body><CS><0x0D,0x0A>

Example:

```

A0 A1 00 4D 6F 03 00 02 01 8B 00 00 00 30 21 D1 88 03 78 00 0B 01 FF 00 0E E5 A9 00 0D EF DA BC
   1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28

FF C7 7F EB 56 33 84 8F C6 90 00 00 00 8B 00 00 09 C5 D0 70 4C B0 1C 03 E3 B5 6F 2B A9 7E 89 40
 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60

BD 01 85 F5 53 BE B7 FF 1A 81 46 FD 1F A0 00 00 00 8E 0D 0A
 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77
    
```

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	6F		UINT8	
2	Sub ID	03		UINT8	
3-4	SV id	0002	Satellite id	UINT16	
5	Valid	01	0: not valid 1: valid	UINT8	
6-9	SubFrameData[0][0]		Eph data subframe 1	UINT32	
10-13	SubFrameData[0][1]		Eph data subframe 1	UINT32	
14-17	SubFrameData[0][2]		Eph data subframe 1	UINT32	
18-21	SubFrameData[0][3]		Eph data subframe 1	UINT32	
22-25	SubFrameData[0][4]		Eph data subframe 1	UINT32	
26-29	SubFrameData[0][5]		Eph data subframe 1	UINT32	
30-33	SubFrameData[0][6]		Eph data subframe 1	UINT32	
34-37	SubFrameData[0][7]		Eph data subframe 1	UINT32	
38-41	SubFrameData[0][8]		Eph data subframe 1	UINT32	
42~77	SubFrameData[1][0~8]		Eph data subframe 2	UINT32	
Payload Length : 77 bytes					

**GET IRNSS EPHEMERIS – Get IRNSS ephemeris data used of GNSS receiver (ID: 0x6F, SID: 0x04)**

This is a request message which is issued from the host to GNSS receiver to retrieve NAVIC ephemeris data. The GNSS receiver should respond with an ACK along with information of ephemeris, “**IRNSS EPHEMERIS DATA, ID 0x6F, SID 0x81**”, when succeeded and should respond with an NACK when failed. The payload length is 3 bytes.

Structure:

<0xA0,0xA1>< PL><6F><04>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 6F 04 00 6B 0D 0A

1 2 3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	6F		UINT8	
2	Sub ID	04		UINT8	
3	SV #	00	0: means all SVs 1~14 : mean for the particular SV	UINT8	
Payload Length : 3 bytes					

**IRNSS EPHEMERIS – IRNSS ephemeris of GNSS receiver (ID: 0x6F, SID: 0x81)**

This is a response message to “GET IRNSS EPHEMERIS, ID 0x6F, SID 0x04”, which provides the IRNSS ephemeris data of the GNSS receiver to Host. The Host will save the ephemeris data as an ephemeris file. This message is sent from the GNSS receiver to host. The payload length is 77 bytes.

Structure:

<0xA0,0xA1>< PL><6F><81>< message body><CS><0x0D,0x0A>

Example:

```
A0 A1 00 4D 6F 81 00 02 01 8B 00 00 00 30 21 D1 88 03 78 00 0B 01 FF 00 0E E5 A9 00 0D EF DA BC
    1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28

FF C7 7F EB 56 33 84 8F C6 90 00 00 00 8B 00 00 09 C5 D0 70 4C B0 1C 03 E3 B5 6F 2B A9 7E 89 40
 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60

BD 01 85 F5 53 BE B7 FF 1A 81 46 FD 1F A0 00 00 00 0C 0D 0A
 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77
```

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	6F		UINT8	
2	Sub ID	81		UINT8	
3-4	SV id	0002	Satellite id	UINT16	
5	Valid	01	0: not valid 1: valid	UINT8	
6-9	SubFrameData[0][0]		Eph data subframe 1	UINT32	
10-13	SubFrameData[0][1]		Eph data subframe 1	UINT32	
14-17	SubFrameData[0][2]		Eph data subframe 1	UINT32	
18-21	SubFrameData[0][3]		Eph data subframe 1	UINT32	
22-25	SubFrameData[0][4]		Eph data subframe 1	UINT32	
26-29	SubFrameData[0][5]		Eph data subframe 1	UINT32	
30-33	SubFrameData[0][6]		Eph data subframe 1	UINT32	
34-37	SubFrameData[0][7]		Eph data subframe 1	UINT32	
38-41	SubFrameData[0][8]		Eph data subframe 1	UINT32	
42~77	SubFrameData[1][0~8]		Eph data subframe 2	UINT32	
Payload Length : 77 bytes					



# OUTPUT MESSAGES

## SOFTWARE VERSION – Software version of the GNSS receiver (0x80)

This is a response message to “**QUERY SOFTWARE VERSION, ID: 0x2**” which provides the software version of the GNSS receiver. This message is sent from the GNSS receiver to host. The example below output the SkyTraq software version as 01.01.01-01.03.14-07.01.18 on System image. The payload length is 14 bytes.

Structure:

<0xA0,0xA1>< PL><80>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 0E 80 01 00 01 01 01 00 01 03 0E 00 07 01 12 98 0D 0A  
           1  2  3  4  5  6  7  8  9  10 11 12 13 14

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	80		UINT8	
2	Software Type	00	0: Reserved 1: System code	UINT8	
3-6	Kernel Version	00010101	X1.Y1.Z1 = SkyTraq Kernel Version Ex. X1=01, Y1=00, Z1=01 (1.0.1)	UINT32	
7-10	ODM version	0001030E	X1.Y1.Z1 = SkyTraq Version Ex. X1=01, Y1=03, Z1=0E (1.3.14)	UINT32	
11-14	Revision	00070112	YYMMDD = SkyTraq Revision Ex. YY=07, MM=01, DD=12 (070118)	UINT32	
Payload Length : 14 bytes					

**SOFTWARE CRC – Software CRC of the GNSS receiver (0x81)**

This is a response message to “**QUERY SOFTWARE CRC, ID: 0x3**” which provides the software CRC of the GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 4 bytes.

Structure:

<0xA0,0xA1>< PL><81>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 04 81 01 98 76 6E 0D 0A  
          1  2  3  4

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	81		UINT8	
2	Software Type	00	0: Reserved 1: System code	UINT8	
3-4	CRC	9876	CRC value	UINT16	
Payload Length : 4 bytes					

## **ACK – Acknowledgement to a Request Message (0x83)**

This is a response message which is an acknowledgement to a request message. The payload length is 2 bytes

Structure:

<0xA0,0xA1>< PL><83>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 83 02 81 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	83		UINT8	
2	ACK ID <sup>*1</sup>	02	Message ID of the request message	UINT8	
Payload Length : 2 bytes					

\*1: ACK ID may further consist of message ID and message sub-ID which will become 3 bytes of ACK message.

**NACK – Response to an unsuccessful request message (0x84)**

This is a response message which is a response to an unsuccessful request message. This is used to notify the Host that the request message has been rejected. The payload length is 2 bytes

Structure:

<0xA0,0xA1>< PL><84>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 84 01 82 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	84		UINT8	
2	NACK ID <sup>*1</sup>	01	Message ID of the request message	UINT8	
Payload Length : 2 bytes					

\*1: NACK ID may further consist of message ID and message sub-ID which will become 3 bytes of NACK message.

**POSITON UPDATE RATE – Position Update rate of the GNSS system (0x86)**

This is a response message to “**QUERY POSITION UPDATE RATE, ID: 0x10**” which provides the position update rate of the GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><86>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 86 01 87 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	86		UINT8	
2	Update Rate	01	01: 1Hz	UINT8	
Payload Length : 2 bytes					

**GLONASS EPHEMERIS DATA – GLONASS ephemeris data of the GLONASS/GPS receiver (0x90)**

This is a response message to “GET GLONASS EPHEMERIS, ID: 0x5B” which provides the GLONASS Ephemeris Data of the receiver to the host. The Host may save the ephemeris data as an ephemeris file. This message is sent from the receiver to host. The payload length is 43 bytes.

Structure:

<0xA0,0xA1>< PL><90>< message body><CS><0x0D,0x0A>

Example:

```
A0 A1 00 2B 90 01 01 01 07 43 0F AC 06 89 A2 01 9A 02 17 60 28 75 47 01 16 FE B5 03 80 06 9C CB
    1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28

CC 92 6A C0 42 04 09 94 79 20 00 00 20 11 85 E3 0D 0A
29 30 31 32 33 34 35 36 37 38 39 40 41 42 43
```

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	90		UINT8	
2	Slot number	01	GLONASS SV slot number	UINT8	
3	K number	01	GLONASS SV frequency number (-7 ~ +6)	SINT8	
4	glo_eph_data0_byte0	01	Stuffing zeros and bit 85 - bit 81 (LSB) of string 1	UINT8	
5	glo_eph_data0_byte1	07	bit 80 (MSB)- bit 73 (LSB) of string 1	UINT8	
6	glo_eph_data0_byte2	43	bit 72 (MSB)- bit 65 (LSB) of string 1	UINT8	
7	glo_eph_data0_byte3	0F	bit 64 (MSB)- bit 57 (LSB) of string 1	UINT8	
8	glo_eph_data0_byte4	AC	bit 56 (MSB)- bit 49 (LSB) of string 1	UINT8	
9	glo_eph_data0_byte5	06	bit 48 (MSB)- bit 41 (LSB) of string 1	UINT8	
10	glo_eph_data0_byte6	89	bit 40 (MSB)- bit 33 (LSB) of string 1	UINT8	
11	glo_eph_data0_byte7	A2	bit 32 (MSB)- bit 25 (LSB) of string 1	UINT8	
12	glo_eph_data0_byte8	01	bit 24 (MSB)- bit 17 (LSB) of string 1	UINT8	
13	glo_eph_data0_byte9	9A	bit 16 (MSB)- bit 09 (LSB) of string 1	UINT8	
14	glo_eph_data1_byte0	02	Stuffing zeros and bit 85 - bit 81 (LSB) of string 2	UINT8	
15	glo_eph_data1_byte1	17	bit 80 (MSB)- bit 73 (LSB) of string 2	UINT8	
16	glo_eph_data1_byte2	60	bit 72 (MSB)- bit 65 (LSB) of string 2	UINT8	
17	glo_eph_data1_byte3	28	bit 64 (MSB)- bit 57 (LSB) of string 2	UINT8	
18	glo_eph_data1_byte4	75	bit 56 (MSB)- bit 49 (LSB) of string 2	UINT8	
19	glo_eph_data1_byte5	47	bit 48 (MSB)- bit 41 (LSB) of string 2	UINT8	

20	glo_eph_data1_byte6	01	bit 40 (MSB)- bit 33 (LSB) of string 2	UINT8	
21	glo_eph_data1_byte7	16	bit 32 (MSB)- bit 25 (LSB) of string 2	UINT8	
22	glo_eph_data1_byte8	FE	bit 24 (MSB)- bit 17 (LSB) of string 2	UINT8	
23	glo_eph_data1_byte9	B5	bit 16 (MSB)- bit 09 (LSB) of string 2	UINT8	
24-33	glo_eph_data2_byte0 - glo_eph_data2_byte9		Stuffing-zeros and bit 85 - bit 09 of string 3		
34-43	glo_eph_data3_byte0 - glo_eph_data3_byte9		Stuffing-zeros and bit 85 - bit 09 of string 4		
Payload Length : 43 bytes					

**GLONASS TIME CORRECTION PARAMETERS – GLONASS time correction parameters (0x92)**

This is a response message to “GET GLONASS TIME CORRECTION, ID: 0x5F” which provides the GLONASS time correction data of the receiver to the host. The Host may save the data as a file. This message is sent from the receiver to host. The payload length is 9 bytes.

Structure:

<0xA0,0xA1>< PL><92>< message body><CS><0x0D,0x0A>

Example:

a0 a1 00 09 92 ff ff ff bf 00 00 00 14 c6 0d 0a  
                   1 2 3 4 5 6 7 8 9

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	92		UINT8	
2-5	$\tau_c$	ffffffbf	GLONASS time scale correction to UTC(SU) time	SINT32	$2^{-31}$ sec
6-9	$\tau_{GPS}$	00000014	Correction to GPS time relative to GLONASS time	SINT32	$2^{-30}$ sec
Payload Length : 9 bytes					



### **GNSS NMEA TALKER ID – NMEA talker ID of GNSS receiver (0x93)**

This is a response message to “**QUERY NMEA TALKER ID, ID: 0x4F**” which provides the type of NMEA talker id of GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><93>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 93 01 92 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	93		UINT8	
2	Talker ID type	01	0: GP mode 1: GN mode 2: Auto mode <sup>*1</sup> : according to NMEA 4.11 to combine GNSS system solution to output GN, GP, GL, GA, GB or GI appropriately.	UINT8	
Payload Length : 2 bytes					

\*1 supported only in NMEA version 4.11

**GNSS DOP MASK – DOP Mask used by the GNSS receiver (0xAF)**

This is a response message to “**QUERY DOP MASK, ID: 0x2E**” which provides the information of DOP masks of the GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 8 bytes.

Structure:

<0xA0,0xA1>< PL><AF>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 08 AF 01 00 32 00 32 00 32 9C 0D 0A  
           1  2  3  4  5  6  7  8

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	AF		UINT8	
2	DOP Mode Select	01	00 : Disable 01 : Auto mode, PDOP when 3-D fix and HDOP when 2-D fix 02 : GDOP only 03 : PDOP only 04 : HDOP only	UINT8	
3-4	PDOP Value	0032	Valid values between 0.5~30 Valid output value 5 ~ 300	UINT16	1/10
5-6	HDOP Value	0032	Valid values between 0.5~30 Valid output value 5 ~ 300	UINT16	1/10
7-8	GDOP Value	0032	Valid values between 0.5~30 Valid output value 5 ~ 300	UINT16	1/10
Payload Length : 8 bytes					

**GNSS ELEVATION AND CNR MASK – Elevation and CNR mask used by the GNSS receiver (0xB0)**

This is a response message to “**QUERY ELEVATION AND CNR MASK, ID: 0x2F**” which provides the information of elevation and CNR masks of the GNSS receiver. When enabled, satellite with elevation angle above the elevation mask value and tracked signal with CNR above the CNR mask value will be used for position fix. This message is sent from the GNSS receiver to host. The payload length is 4 bytes.

Structure:

<0xA0,0xA1>< PL><B0>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 04 B0 01 05 00 B4 0D 0A

1 2 3 4

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	B0		UINT8	
2	Elevation and CNR Mask Select	01	00 : Disable 01 : Elevation and CNR both 02 : Elevation only 03 : CNR only	UINT8	
3	Elevation Mask	05	Value of elevation mask	UINT8	degree
4	CNR Mask	00	Value of CNR mask	UINT8	dB
Payload Length : 4 bytes					

**GPS EPHEMERIS DATA – GPS ephemeris data of the GNSS receiver (0xB1)**

This is a response message to “GET GPS EPHEMERIS, ID: 0x30” which provides the GPS Ephemeris Data of the GNSS receiver to Host. The Host will save the ephemeris data as an ephemeris file. This message is sent from the GNSS receiver to host. The payload length is 87 bytes.

Structure:

<0xA0,0xA1>< PL><B1>< message body><CS><0x0D,0x0A>

Example:

```

A0 A1 00 57 B1 00 02 00 77 88 04 61 10 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 DB DF 59 A6 00 00 1E
    1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28

0A 47 7C 00 77 88 88 DF FD 2E 35 A9 CD B0 F0 9F FD A7 04 8E CC A8 10 2C A1 0E 22 31 59 A6 74 00
29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60

77 89 0C FF A3 59 86 C7 77 FF F8 26 97 E3 B9 1C 60 59 C3 07 44 FF A6 37 DF F0 B0 5E 0D 0A
61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87
    
```

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	B1		UINT8	
2-3	SV ID	0x1	Satellite id	UINT16	
4	SubFrameData[0][0]	00	Eph data subframe 1	UINT8	
5	SubFrameData[0][1]	00	Eph data subframe 1	UINT8	
6	SubFrameData[0][2]	00	Eph data subframe 1	UINT8	
7	SubFrameData[0][3]	00	Eph data subframe 1	UINT8	
8	SubFrameData[0][4]	00	Eph data subframe 1	UINT8	
9	SubFrameData[0][5]	00	Eph data subframe 1	UINT8	
10	SubFrameData[0][6]	00	Eph data subframe 1	UINT8	
11	SubFrameData[0][7]	00	Eph data subframe 1	UINT8	
12	SubFrameData[0][8]	00	Eph data subframe 1	UINT8	
13	SubFrameData[0][9]	00	Eph data subframe 1	UINT8	
14	SubFrameData[0][10]	00	Eph data subframe 1	UINT8	
15	SubFrameData[0][11]	00	Eph data subframe 1	UINT8	
16	SubFrameData[0][12]	00	Eph data subframe 1	UINT8	
17	SubFrameData[0][13]	00	Eph data subframe 1	UINT8	
18	SubFrameData[0][14]	00	Eph data subframe 1	UINT8	
19	SubFrameData[0][15]	00	Eph data subframe 1	UINT8	
20	SubFrameData[0][16]	00	Eph data subframe 1	UINT8	

21	SubFrameData[0][17]	00	Eph data subframe 1	UINT8	
22	SubFrameData[0][18]	00	Eph data subframe 1	UINT8	
23	SubFrameData[0][19]	00	Eph data subframe 1	UINT8	
24	SubFrameData[0][20]	00	Eph data subframe 1	UINT8	
25	SubFrameData[0][21]	00	Eph data subframe 1	UINT8	
26	SubFrameData[0][22]	00	Eph data subframe 1	UINT8	
27	SubFrameData[0][23]	00	Eph data subframe 1	UINT8	
28	SubFrameData[0][24]	00	Eph data subframe 1	UINT8	
29	SubFrameData[0][25]	00	Eph data subframe 1	UINT8	
30	SubFrameData[0][26]	00	Eph data subframe 1	UINT8	
31	SubFrameData[0][27]	00	Eph data subframe 1	UINT8	
32~59	SubFrameData[1][0~27]	00	Eph data subframe 2, same as field 4-31	UINT8	
60-87	SubFrameData[2][0~27]	00	Eph data subframe 3, same as field 4-31	UINT8	

Payload Length : 87 bytes

**GNSS POSITON PINNING STATUS – Position pinning status of the GNSS receiver (0xB4)**

This is a response message to “**QUERY POSITION PINNING, ID 0x3A**” which provides the position pinning status and position pinning parameters of the GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 12 bytes.

Structure:

<0xA0,0xA1>< PL><B4>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 0C B4 02 00 02 00 0A 00 08 00 2D 01 F4 67 0D 0A  
 1 2 3 4 5 6 7 8 9 10 11 12

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	B4		UINT8	
2	status	02	0: default 1: enable 2: disable	UINT8	
3-4	Pinning speed	0002	Be effective when status is enable	UINT16	Km/Hr
5-6	Pinning cnt	000A	Be effective when status is enable	UINT16	second
7-8	Unpinning speed	0008	Be effective when status is enable	UINT16	Km/Hr
9-10	Unpinning cnt	002D	Be effective when status is enable	UINT16	second
11-12	Unpinning distance	01F4	Be effective when status is enable	UINT16	meter
Payload Length : 12 bytes					

**GNSS POWER MODE STATUS – Power mode status of the GNSS receiver (0xB9)**

This is a response message to “**QUERY POWER MODE, ID: 0x15**” which provides the power mode status of the GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 2 bytes.

Structure:

<0xA0,0xA1>< PL><B9>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 02 B9 00 B9 0D 0A

1 2

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	B9		UINT8	
2	Mode	00	00 = Normal (disable power save) 01 = Power Save (enable power save)	UINT8	
Payload Length : 2 bytes					

**GNSS 1PPS CABLE DELAY – 1PPS cable delay of the GNSS receiver (0xBB)**

This is a response message to “**QUERY 1PPS CABLE DELAY, ID: 0x46**” which provides the 1PPS cable delay of the GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 5 bytes.

Structure:

<0xA0,0xA1>< PL><BB>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 05 BB 00 00 00 00 BB 0D 0A  
          1 2 3 4 5

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	BB		UINT8	-
2-5	Cable Delay	00000000	Cable delay of 1PPS timing mode Return value is in unit of 1/100 ns. Ex. If 100 is the cable delay, it's of value 1ns.	SINT32	1/100 ns
Payload Length : 5 bytes					



**GNSS 1PPS TIMING – 1PPS timing information of the GNSS receiver (0xC2)\*1**

This is a response message to “**QUERY 1PPS TIMING, ID: 0x44**” which provides the information of 1PPS timing of the GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 35 bytes.

Structure:

<0xA0,0xA1>< PL><C2>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 23 C2 00 00 00 07 D0 00 00 00 1E 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27

00 00 00 01 00 00 07 D0 DC 0D 0A  
 28 29 30 31 32 33 34 35

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	C2		UINT8	-
2	Saved Timing Mode	00	00 = Timing PVT Mode 01 = Timing Survey Mode 02 = Timing Static Mode Value saved in SRAM/Flash by request command, QUERY 1PPS TIMING, id 0x44 with attribute 1 or 2	UINT8	
3-6	Saved Survey Length	000007D0	Survey length used when in “Saved Timing Survey Mode”. Value saved in SRAM/Flash by request command, QUERY 1PPS TIMING, id 0x44 with attribute 1 or 2	UINT32	
7-10	Standard deviation	0000001E	Standard Deviation when in Timing Survey Mode not used when in other mode. Valid values between 3~100	UINT32	
11-18	Saved Latitude	0000000000000000	Latitude in double in Timing Static Mode	DPFP	
19-26	Saved Longitude	0000000000000000	Longitude in double in Timing Static Mode	DPFP	
27-30	Saved Altitude	00000000	Altitude in float in Timing Static Mode	SPFP	
31	Run-time Timing Mode	00	00 = Timing Normal Mode 01 = Timing Survey Mode 02 = Timing Static Mode	UINT8	

			Value currently used and not saved in SRAM/Flash by QUERY 1PPS TIMING, id 0x44 with attribute 0		
32-35	Run-time Survey Length	000007D0	Survey length used when in "Run-time Timing Survey Mode". Value currently used and not saved in SRAM/Flash by QUERY 1PPS TIMING, id 0x44 with attribute 0	UINT32	
Payload Length : 35 bytes					

\*1: supported only in timing mode receivers.

**GNSS 1PPS OUTPUT MODE – 1PPS output mode of the GNSS receiver (0xC3)\*1**

This is a response message to “**QUERY 1PPS OUTPUT MODE, ID: 0x56**” which provides the information of 1PPS output mode of the GNSS receiver. This message is sent from the GNSS receiver to host. The payload length is 3 bytes.

Structure:

<0xA0,0xA1>< PL><C3>< message body><CS><0x0D,0x0A>

Example:

A0 A1 00 03 C3 00 00 C3 0D 0A  
          1 2 3

Field	Name	Example(hex)	Description	Type	Unit
1	Message ID	C3		UINT8	-
2	Output Mode	00	00 = No output 01 = Output if GNSS time is available 02 = Output always and align to GNSS time automatically	UINT8	
3	Align Source	00	00 = Align to GNSS 01 = Align to UTC	UINT8	
Payload Length : 3 bytes					

\*1: supported only in timing mode receivers

## A. Ellipsoid List

Ellipsoid Index	Ellipsoid	Semi-major axis (a)	Inversed Flattening (1/f)
1	Airy 1830	6377563.396	299.3249646
2	Modified Airy	6377340.189	299.3249646
3	Australian National	6378160	298.25
4	Bessel 1841 (Namibia)	6377483.865	299.1528128
5	Bessel 1841	6377397.155	299.1528128
6	Clarke 1866	6378206.4	294.9786982
7	Clarke 1880	6378249.145	293.465
8	Everest (India 1830)	6377276.345	300.8017
9	Everest (Sabah Sarawak)	6377298.556	300.8017
10	Everest (India 1956)	6377301.243	300.8017
11	Everest (Malaysia 1969)	6377295.664	300.8017
12	Everest (Malay. & Sing)	6377304.063	300.8017
13	Everest (Pakistan)	6377309.613	300.8017
14	Modified Fischer 1960	6378155	298.3
15	Helmert 1906	6378200	298.3
16	Hough 1960	6378270	297
17	Indonesian 1974	6378160	298.247
18	International 1924	6378388	297
19	Krassovsky 1940	6378245	298.3
20	GRS 80	6378137	298.257222101
21	South American 1969	6378160	298.25
22	WGS 72	6378135	298.26
23	WGS 84	6378137	298.257223563
24	PZ-90	6378136	298.257839303 <sup>*1</sup>
25	ITRF	6378137	298.257222101 <sup>*1</sup>

\*1 supported only in Configure GNSS Datum ((ID: 0x64, SID: 0x27).

## B. Datum Reference List

Datum index	Datum Name	Delta X	Delta Y	Delta Z	Ellipsoid	Ellipsoid Index	Region of Use
0	WGS-84	0	0	0	WGS 84	23	Global
1	Adindan	-118	-14	218	Clarke 1880	7	Burkina Faso
2	Adindan	-134	-2	210	Clarke 1880	7	Cameroon
3	Adindan	-165	-11	206	Clarke 1880	7	Ethiopia
4	Adindan	-123	-20	220	Clarke 1880	7	Mali
5	Adindan	-166	-15	204	Clarke 1880	7	MEAN FOR Ethiopia; Sudan
6	Adindan	-128	-18	224	Clarke 1880	7	Senegal
7	Adindan	-161	-14	205	Clarke 1880	7	Sudan
8	Afgooye	-43	-163	45	Krassovsky 1940	19	Somalia
9	Ain el Abd 1970	-150	-250	-1	International 1924	18	Bahrain
10	Ain el Abd 1970	-143	-236	7	International 1924	18	Saudi Arabia
11	American Samoa 1962	-115	118	426	Clarke 1866	6	American Samoa Islands
12	Anna 1 Astro 1965	-491	-22	435	Australian National	3	Cocos Islands
13	Antigua Island Astro 1943	-270	13	62	Clarke 1880	7	Antigua (Leeward Islands)
14	Arc 1950	-138	-105	-289	Clarke 1880	7	Botswana
15	Arc 1950	-153	-5	-292	Clarke 1880	7	Burundi
16	Arc 1950	-125	-108	-295	Clarke 1880	7	Lesotho
17	Arc 1950	-161	-73	-317	Clarke 1880	7	Malawi
18	Arc 1950	-143	-90	-294	Clarke 1880	7	MEAN FOR Botswana; Lesotho; Malawi; Swaziland; Zaire; Zambia; Zimbabwe
19	Arc 1950	-134	-105	-295	Clarke 1880	7	Swaziland
20	Arc 1950	-169	-19	-278	Clarke 1880	7	Zaire
21	Arc 1950	-147	-74	-283	Clarke 1880	7	Zambia
22	Arc 1950	-142	-96	-293	Clarke 1880	7	Zimbabwe
23	Arc 1960	-160	-6	-302	Clarke 1880	7	MEAN FOR Kenya; Tanzania
24	Arc 1960	-157	-2	-299	Clarke 1880	7	Kenya
25	Arc 1960	-175	-23	-303	Clarke 1880	7	Taanзания
26	Ascension Island 1958	-205	107	53	International 1924	18	Ascension Island
27	Astro Beacon E 1945	145	75	-272	International 1924	18	Iwo Jima
28	Astro DOS 71/4	-320	550	-494	International 1924	18	St Helena Island
29	Astro Tern Island (FRIG) 1961	114	-116	-333	International 1924	18	Tern Island
30	Astronomical Station 1952	124	-234	-25	International 1924	18	Marcus Island
31	Australian Geodetic 1966	-133	-48	148	Australian National	3	Australia; Tasmania
32	Australian Geodetic 1984	-134	-48	149	Australian National	3	Australia; Tasmania
33	Ayabelle Lighthouse	-79	-129	145	Clarke 1880	7	Djibouti
34	Bellevue (IGN)	-127	-769	472	International 1924	18	Efate & Erromango Islands
35	Bermuda 1957	-73	213	296	Clarke 1866	6	Bermuda
36	Bissau	-173	253	27	International 1924	18	Guinea-Bissau
37	Bogota Observatory	307	304	-318	International 1924	18	Colombia
38	Bukit Rimpah	-384	664	-48	Bessel 1841	5	Indonesia (Bangka & Belitung Ids)
39	Camp Area Astro	-104	-129	239	International 1924	18	Antarctica (McMurdo Camp Area)
40	Campo Inchauspe	-148	136	90	International 1924	18	Argentina
41	Canton Astro 1966	298	-304	-375	International 1924	18	Phoenix Islands
42	Cape	-136	-108	-292	Clarke 1880	7	South Africa
43	Cape Canaveral	-2	151	181	Clarke 1866	6	Bahamas; Florida
44	Carthage	-263	6	431	Clarke 1880	7	Tunisia
45	Chatham Island Astro 1971	175	-38	113	International 1924	18	New Zealand (Chatham Island)
46	Chua Astro	-134	229	-29	International 1924	18	Paraguay
47	Corrego Alegre	-206	172	-6	International 1924	18	Brazil
48	Dabola	-83	37	124	Clarke 1880	7	Guinea
49	Deception Island	260	12	-147	Clarke 1880	7	Deception Island; Antarctica

50	Djakarta (Batavia)	-377	681	-50	Bessel 1841	5	Indonesia (Sumatra)
51	DOS 1968	230	-199	-752	International 1924	18	New Georgia Islands (Gizo Island)
52	Easter Island 1967	211	147	111	International 1924	18	Easter Island
53	Estonia; Coordinate System 1937	374	150	588	Bessel 1841	5	Estonia
54	European 1950	-104	-101	-140	International 1924	18	Cyprus
55	European 1950	-130	-117	-151	International 1924	18	Egypt
56	European 1950	-86	-96	-120	International 1924	18	England; Channel Islands; Scotland; Shetland Islands
57	European 1950	-86	-96	-120	International 1924	18	England; Ireland; Scotland; Shetland Islands
58	European 1950	-87	-95	-120	International 1924	18	Finland; Norway
59	European 1950	-84	-95	-130	International 1924	18	Greece
60	European 1950	-117	-132	-164	International 1924	18	Iran
61	European 1950	-97	-103	-120	International 1924	18	Italy (Sardinia)
62	European 1950	-97	-88	-135	International 1924	18	Italy (Sicily)
63	European 1950	-107	-88	-149	International 1924	18	Malta
64	European 1950	-87	-98	-121	International 1924	18	MEAN FOR Austria; Belgium; Denmark; Finland; France; W Germany; Gibraltar; Greece; Italy; Luxembourg; Netherlands; Norway; Portugal; Spain; Sweden; Switzerland
65	European 1950	-87	-96	-120	International 1924	18	MEAN FOR Austria; Denmark; France; W Germany; Netherlands; Switzerland
66	European 1950	-103	-106	-141	International 1924	18	MEAN FOR Iraq; Israel; Jordan; Lebanon; Kuwait; Saudi Arabia; Syria
67	European 1950	-84	-107	-120	International 1924	18	Portugal; Spain
68	European 1950	-112	-77	-145	International 1924	18	Tunisia
69	European 1979	-86	-98	-119	International 1924	18	MEAN FOR Austria; Finland; Netherlands; Norway; Spain; Sweden; Switzerland
70	Fort Thomas 1955	-7	215	225	Clarke 1880	7	Nevis; St. Kitts (Leeward Islands)
71	Gan 1970	-133	-321	50	International 1924	18	Republic of Maldives
72	Geodetic Datum 1949	84	-22	209	International 1924	18	New Zealand
73	Graciosa Base SW 1948	-104	167	-38	International 1924	18	Azores (Faial; Graciosa; Pico; Sao Jorge; Terceira)
74	Guam 1963	-100	-248	259	Clarke 1866	6	Guam
75	Gunung Segara	-403	684	41	Bessel 1841	5	Indonesia (Kalimantan)
76	GUX 1 Astro	252	-209	-751	International 1924	18	Guadalcanal Island
77	Herat North	-333	-222	114	International 1924	18	Afghanistan
78	Hermannskogel Datum	653	-212	449	Bessel 1841 (Namibia)	4	Croatia -Serbia, Bosnia-Herzegovina
79	Hjorsey 1955	-73	46	-86	International 1924	18	Iceland

80	Hong Kong 1963	-156	-271	-189	International 1924	18	Hong Kong
81	Hu-Tzu-Shan	-637	-549	-203	International 1924	18	Taiwan
82	Indian	282	726	254	Everest (India 1830)	8	Bangladesh
83	Indian	295	736	257	Everest (India 1956)	10	India; Nepal
84	Indian	283	682	231	Everest (Pakistan)	13	Pakistan
85	Indian 1954	217	823	299	Everest (India 1830)	8	Thailand
86	Indian 1960	182	915	344	Everest (India 1830)	8	Vietnam (Con Son Island)
87	Indian 1960	198	881	317	Everest (India 1830)	8	Vietnam (Near 16øN))
88	Indian 1975	210	814	289	Everest (India 1830)	8	Thailand
89	Indonesian 1974	-24	-15	5	Indonesian 1974	17	Indonesia
90	Ireland 1965	506	-122	611	Modified Airy	2	Ireland
91	ISTS 061 Astro 1968	-794	119	-298	International 1924	18	South Georgia Islands
92	ISTS 073 Astro 1969	208	-435	-229	International 1924	18	Diego Garcia
93	Johnston Island 1961	189	-79	-202	International 1924	18	Johnston Island
94	Kandawala	-97	787	86	Everest (India 1830)	8	Sri Lanka
95	Kerguelen Island 1949	145	-187	103	International 1924	18	Kerguelen Island
96	Kertau 1948	-11	851	5	Everest (Malay. & Sing)	12	West Malaysia & Singapore
97	Kusaie Astro 1951	647	1777	-1124	International 1924	18	Caroline Islands
98	Korean Geodetic System	0	0	0	GRS 80	20	South Korea
99	L. C. 5 Astro 1961	42	124	147	Clarke 1866	6	Cayman Brac Island
100	Leigon	-130	29	364	Clarke 1880	7	Ghana
101	Liberia 1964	-90	40	88	Clarke 1880	7	Liberia
102	Luzon	-133	-77	-51	Clarke 1866	6	Philippines (Excluding Mindanao)
103	Luzon	-133	-79	-72	Clarke 1866	6	Philippines (Mindanao)
104	M'Poraloko	-74	-130	42	Clarke 1880	7	Gabon
105	Mahe 1971	41	-220	-134	Clarke 1880	7	Mahe Island
106	Massawa	639	405	60	Bessel 1841	5	Ethiopia (Eritrea)
107	Merchich	31	146	47	Clarke 1880	7	Morocco
108	Midway Astro 1961	912	-58	1227	International 1924	18	Midway Islands
109	Minna	-81	-84	115	Clarke 1880	7	Cameroon
110	Minna	-92	-93	122	Clarke 1880	7	Nigeria
111	Montserrat Island Astro 1958	174	359	365	Clarke 1880	7	Montserrat (Leeward Islands)
112	Nahrwan	-247	-148	369	Clarke 1880	7	Oman (Masirah Island)
113	Nahrwan	-243	-192	477	Clarke 1880	7	Saudi Arabia
114	Nahrwan	-249	-156	381	Clarke 1880	7	United Arab Emirates
115	Naparima BWI	-10	375	165	International 1924	18	Trinidad & Tobago
116	North American 1927	-5	135	172	Clarke 1866	6	Alaska (Excluding Aleutian Ids)
117	North American 1927	-2	152	149	Clarke 1866	6	Alaska (Aleutian Ids East of 180øW)

118	North American 1927	2	204	105	Clarke 1866	6	Alaska (Aleutian Ids West of 180°W)
119	North American 1927	-4	154	178	Clarke 1866	6	Bahamas (Except San Salvador Id)
120	North American 1927	1	140	165	Clarke 1866	6	Bahamas (San Salvador Island)
121	North American 1927	-7	162	188	Clarke 1866	6	Canada (Alberta; British Columbia)
122	North American 1927	-9	157	184	Clarke 1866	6	Canada (Manitoba; Ontario)
123	North American 1927	-22	160	190	Clarke 1866	6	Canada (New Brunswick; Newfoundland; Nova Scotia; Quebec)
124	North American 1927	4	159	188	Clarke 1866	6	Canada (Northwest Territories; Saskatchewan)
125	North American 1927	-7	139	181	Clarke 1866	6	Canada (Yukon)
126	North American 1927	0	125	201	Clarke 1866	6	Canal Zone
127	North American 1927	-9	152	178	Clarke 1866	6	Cuba
128	North American 1927	11	114	195	Clarke 1866	6	Greenland (Hayes Peninsula)
129	North American 1927	-3	142	183	Clarke 1866	6	MEAN FOR Antigua; Barbados; Barbuda; Caicos Islands; Cuba; Dominican Republic; Grand Cayman; Jamaica; Turks Islands
130	North American 1927	0	125	194	Clarke 1866	6	MEAN FOR Belize; Costa Rica; El Salvador; Guatemala; Honduras; Nicaragua
131	North American 1927	-10	158	187	Clarke 1866	6	MEAN FOR Canada
132	North American 1927	-8	160	176	Clarke 1866	6	MEAN FOR CONUS
133	North American 1927	-9	161	179	Clarke 1866	6	MEAN FOR CONUS (East of Mississippi; River Including Louisiana; Missouri; Minnesota)
134	North American 1927	-8	159	175	Clarke 1866	6	MEAN FOR CONUS (West of Mississippi; River Excluding Louisiana; Minnesota; Missouri)
135	North American 1927	-12	130	190	Clarke 1866	6	Mexico
136	North American 1983	0	0	0	GRS 80	20	Alaska (Excluding Aleutian Ids)
137	North American 1983	-2	0	4	GRS 80	20	Aleutian Ids
138	North American 1983	0	0	0	GRS 80	20	Canada
139	North American 1983	0	0	0	GRS 80	20	CONUS
140	North American 1983	1	1	-1	GRS 80	20	Hawaii
141	North American 1983	0	0	0	GRS 80	20	Mexico; Central America
142	North Sahara 1959	-186	-93	310	Clarke 1880	7	Algeria
143	Observatorio Meteorologico 1939	-425	-169	81	International 1924	18	Azores (Corvo & Flores Islands)
144	Old Egyptian 1907	-130	110	-13	Helmert 1906	15	Egypt
145	Old Hawaiian	89	-279	-183	Clarke 1866	6	Hawaii
146	Old Hawaiian	45	-290	-172	Clarke 1866	6	Kauai
147	Old Hawaiian	65	-290	-190	Clarke 1866	6	Maui



148	Old Hawaiian	61	-285	-181	Clarke 1866	6	MEAN FOR Hawaii; Kauai; Maui; Oahu
149	Old Hawaiian	58	-283	-182	Clarke 1866	6	Oahu
150	Oman	-346	-1	224	Clarke 1880	7	Oman
151	Ordnance Survey Great Britain 1936	371	-112	434	Airy 1830	1	England
152	Ordnance Survey Great Britain 1936	371	-111	434	Airy 1830	1	England; Isle of Man; Wales
153	Ordnance Survey Great Britain 1936	375	-111	431	Airy 1830	1	MEAN FOR England; Isle of Man; Scotland; Shetland Islands; Wales
154	Ordnance Survey Great Britain 1936	384	-111	425	Airy 1830	1	Scotland; Shetland Islands
155	Ordnance Survey Great Britain 1936	370	-108	434	Airy 1830	1	Wales
156	Pico de las Nieves	-307	-92	127	International 1924	18	Canary Islands
157	Pitcairn Astro 1967	185	165	42	International 1924	18	Pitcairn Island
158	Point 58	-106	-129	165	Clarke 1880	7	MEAN FOR Burkina Faso & Niger
159	Pointe Noire 1948	-148	51	-291	Clarke 1880	7	Congo
160	Porto Santo 1936	-499	-249	314	International 1924	18	Porto Santo; Madeira Islands
161	Provisional South American 1956	-270	188	-388	International 1924	18	Bolivia
162	Provisional South American 1956	-270	183	-390	International 1924	18	Chile (Northern; Near 19 øS)
163	Provisional South American 1956	-305	243	-442	International 1924	18	Chile (Southern; Near 43 øS)
164	Provisional South American 1956	-282	169	-371	International 1924	18	Colombia
165	Provisional South American 1956	-278	171	-367	International 1924	18	Ecuador
166	Provisional South American 1956	-298	159	-369	International 1924	18	Guyana
167	Provisional South American 1956	-288	175	-376	International 1924	18	MEAN FOR Bolivia; Chile; Colombia; Ecuador; Guyana; Peru; Venezuela
168	Provisional South American 1956	-279	175	-379	International 1924	18	Peru
169	Provisional South American 1956	-295	173	-371	International 1924	18	Venezuela
170	Provisional South Chilean 1963	16	196	93	International 1924	18	Chile (Near 53 øS) (Hito XVIII)
171	Puerto Rico	11	72	-101	Clarke 1866	6	Puerto Rico; Virgin Islands
172	Pulkovo 1942	28	-130	-95	Krassovsky 1940	19	Russia
173	Qatar National	-128	-283	22	International 1924	18	Qatar
174	Qornoq	164	138	-189	International 1924	18	Greenland (South)
175	Reunion	94	-948	-1262	International 1924	18	Mascarene Islands
176	Rome 1940	-225	-65	9	International 1924	18	Italy (Sardinia)
177	S-42 (Pulkovo 1942)	28	-121	-77	Krassovsky 1940	19	Hungary
178	S-42 (Pulkovo 1942)	23	-124	-82	Krassovsky 1940	19	Poland
179	S-42 (Pulkovo 1942)	26	-121	-78	Krassovsky 1940	19	Czechoslovakia
180	S-42 (Pulkovo 1942)	24	-124	-82	Krassovsky 1940	19	Latvia
181	S-42 (Pulkovo 1942)	15	-130	-84	Krassovsky 1940	19	Kazakhstan
182	S-42 (Pulkovo 1942)	24	-130	-92	Krassovsky 1940	19	Albania

183	S-42 (Pulkovo 1942)	28	-121	-77	Krassovsky 1940	19	Romania
184	S-JTSK	589	76	480	Bessel 1841	5	Czechoslovakia (Prior 1 JAN 1993)
185	Santo (DOS) 1965	170	42	84	International 1924	18	Espirito Santo Island
186	Sao Braz	-203	141	53	International 1924	18	Azores (Sao Miguel; Santa Maria Ids)
187	Sapper Hill 1943	-355	21	72	International 1924	18	East Falkland Island
188	Schwarzeck	616	97	-251	Bessel 1841 (Namibia)	4	Namibia
189	Selvagem Grande 1938	-289	-124	60	International 1924	18	Salvage Islands
190	Sierra Leone 1960	-88	4	101	Clarke 1880	7	Sierra Leone
191	South American 1969	-62	-1	-37	South American 1969	21	Argentina
192	South American 1969,	-61	2	-48	South American 1969	21	Bolivia
193	South American 1969,	-60	-2	-41	South American 1969	21	Brazil
194	South American 1969,	-75	-1	-44	South American 1969	21	Chile
195	South American 1969,	-44	6	-36	South American 1969	21	Colombia
196	South American 1969,	-48	3	-44	South American 1969	21	Ecuador
197	South American 1969,	-47	26	-42	South American 1969	21	Ecuador (Baltra; Galapagos)
198	South American 1969,	-53	3	-47	South American 1969	21	Guyana
199	South American 1969,	-57	1	-41	South American 1969	21	MEAN FOR Argentina; Bolivia; Brazil; Chile; Colombia; Ecuador; Guyana; Paraguay; Peru; Trinidad & Tobago; Venezuela
200	South American 1969,	-61	2	-33	South American 1969	21	Paraguay
201	South American 1969,	-58	0	-44	South American 1969	21	Peru
202	South American 1969,	-45	12	-33	South American 1969	21	Trinidad & Tobago
203	South American 1969,	-45	8	-33	South American 1969	21	Venezuela
204	South Asia	7	-10	-26	Modified Fischer 1960	14	Singapore
205	Tananarive Observatory 1925	-189	-242	-91	International 1924	18	Madagascar
206	Timbalai 1948	-679	669	-48	Everest (Sabah Sarawak)	9	Brunei; E. Malaysia (Sabah Sarawak)
207	Tokyo	-148	507	685	Bessel 1841	5	Japan
208	Tokyo	-148	507	685	Bessel 1841	5	MEAN FOR Japan; South Korea; Okinawa
209	Tokyo	-158	507	676	Bessel 1841	5	Okinawa
210	Tokyo	-147	506	687	Bessel 1841	5	South Korea
211	Tristan Astro 1968	-632	438	-609	International 1924	18	Tristan da Cunha
212	Viti Levu 1916	51	391	-36	Clarke 1880	7	Fiji (Viti Levu Island)
213	Voirol 1960	-123	-206	219	Clarke 1880	7	Algeria
214	Wake Island Astro 1952	276	-57	149	International 1924	18	Wake Atoll
215	Wake-Eniwetok 1960	102	52	-38	Hough 1960	16	Marshall Islands
216	WGS 1972	0	0	0	WGS 72	22	Global Definition
217	Yacare	-155	171	37	International 1924	18	Uruguay

218	Zanderij	-265	120	-358	International 1924	18	Suriname
-----	----------	------	-----	------	--------------------	----	----------

Datum index	Datum Name	Delta X	Delta Y	Delta Z	Rotation X	Rotation Y	Rotation Z	Scale Factor	Ellipsoid	Ellipsoid Index	Region of Use
219 <sup>*1</sup>	Pulkovo 1995	24.82	-131.21	-82.66	0.000	0.000	-0.160	-82.66	Krassovsky 1940	19	Russia
220 <sup>*1</sup>	PZ-90	0.00	0.00	1.50	0.000	0.000	-0.076	0	PZ-90	24	Global
221 <sup>*1</sup>	CSCS2000	-0.0048	-0.0026	0.0332	0	0	-0.0006	-0.00292	ITRF	25	China

\*1 supported only in Configure GNSS Datum ((ID: 0x64, SID: 0x27).

## Change Log

Ver 1.4.49 Dec. 30, 2020

1. Add "Configure RTK Slave Base Serial Port Baud Rate, ID: 0x6A, SID: 0xC", "Query RTK Slave Base Serial Port Baud Rate, ID: 0x6A, SID: 0xD", and "RTK Slave Base Serial Port Baud Rate, ID: 0x6A, SID: 0x85" 3 messages
2. Add "Configure RTK Precisely Kinematic Base Serial Port Baud Rate, ID: 0x6A, SID: 0x13", "Query RTK Precisely Kinematic Base Serial Port Baud Rate, ID: 0x6A, SID: 0x14", and "RTK Precisely Kinematic Base Serial Port Baud Rate, ID: 0x6A, SID: 0x88" 3 messages.
3. Add "Configure NMEA String Interval, ID: 0x64, SID: 0x3B", "Query NMEA String Interval, ID: 0x64, SID: 0x3C", and "NMEA String Interval, ID: 0x64, SID: 0x9D" 3 messages
4. Add "Configure 1PPS Output Mode, ID: 0x55", "Query 1PPS Output Mode, ID: 0x56" and "1PPS Output Mode, ID: 0xC3" 3 messages.
5. Update "Configure NMEA Talker ID, ID: 0x4B" and "NMEA Talker ID, ID: 0x93" to add auto mode.

Ver 1.4.48, Aug. 14, 2020

1. Update appendix A, Ellipsoid List and appendix B, Datum Reference List to add CGCS2000 coordinate datum index.

Ver 1.4.47, April 14, 2020

1. Initial release based on AN0028 1.4.46.

SkyTraq Technology, Inc.  
5F, No.26, Minsiang Street, Hsinchu, Taiwan, 300  
Phone: +886 3 5678650  
Fax: +886 3 5678680  
Email: [info@skytraq.com.tw](mailto:info@skytraq.com.tw)

© 2006 SkyTraq Technology Inc. All rights reserved.

Not to be reproduced in whole or part for any purpose without written permission of SkyTraq Technology Inc ("SkyTraq"). Information provided by SkyTraq is believed to be accurate and reliable. These materials are provided by SkyTraq as a service to its customers and may be used for informational purposes only. SkyTraq assumes no responsibility for errors or omissions in these materials, nor for its use. SkyTraq reserves the right to change specification at any time without notice.

These materials are provided "as is" without warranty of any kind, either expressed or implied, relating to sale and/or use of SkyTraq products including liability or warranties relating to fitness for a particular purpose, consequential or incidental damages, merchantability, or infringement of any patent, copyright or other intellectual property right. SkyTraq further does not warrant the accuracy or completeness of the information, text, graphics or other items contained within these materials. SkyTraq shall not be liable for any special, indirect, incidental, or consequential damages, including without limitation, lost revenues or lost profits, which may result from the use of these materials.

SkyTraq products are not intended for use in medical, life-support devices, or applications involving potential risk of death, personal injury, or severe property damage in case of failure of the product.